

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 826.1570/JDH

First Named Inventor or Application Identifier:

Nobuhiro SAITOU

Express Mail Label No.

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

**ADDRESS TO: Assistant Commissioner for Patents**  
**Box Patent Application**  
**Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract ..... [ Total Pages: 66 ]
3. ☒ Drawing(s) (35 USC 113) ..... [ Total Sheets: 47 ]
4. ☒ Oath or Declaration ..... [ Total Pages: 3 ]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)     ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s)     ☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

**17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:**
☐ Continuation   ☐ Divisional   ☐ Continuation-in-part (CIP) of prior application No:         
**18. CORRESPONDENCE ADDRESS**
 STAAS & HALSEY  
 Attn: James D. Halsey, Jr.  
 700 Eleventh Street, N.W., Suite 500  
 Washington, DC 20001

 Telephone: (202) 434-1500  
 Facsimile: (202) 434-1501

 11/02/99  
 09/432113  
 PTO  
 U.S.

 11/02/99  
 09/432113  
 PTO  
 U.S.

 11/02/99  
 09/432113  
 PTO  
 U.S.

APPLICATION FOR  
UNITED STATES LETTERS PATENT  
SPECIFICATION

Inventor(s): Nobuhiro SAITOU

Title of the Invention: GRAPHIC EDITING APPARATUS, GRAPHIC  
EDITING METHOD AND STORAGE MEDIUM  
ON WHICH IS RECORDED A PROGRAM FOR  
GRAPHIC EDITING

**GRAPHIC EDITING APPARATUS, GRAPHIC EDITING METHOD AND  
STORAGE MEDIUM ON WHICH IS RECORDED A PROGRAM FOR  
GRAPHIC EDITING**

**5 Background of the Invention**

**Field of the Invention**

The present invention relates to an apparatus or method for inserting another object between objects connected with each other.

10

**Description of the Related Art**

Today it is common for a variety of flowcharts to be drawn using a computer. Software, for example, "Power Point" (Microsoft), "Visio" (Visio), etc., with  
15 a function to draw a graphic, etc., are well known.

A flowchart is used, for example, to indicate the procedure (or sequence) of a working process and the procedure of the process of a software program, and it usually includes a plurality of objects, and lines  
20 or connectors connecting the plurality of objects.

Fig. 1A is an example of a flowchart displayed on the monitor of a computer. In this flowchart, three objects (objects A through C) are connected in alphabetical order. A box formed using dotted lines  
25 indicates a display area in a virtual coordinate

system, and it is not actually displayed. A rectangle in each box indicates an object. An object drawn using solid lines and an object drawn using dotted lines indicate a state where data are set and a state where data are not set, respectively. Objects drawn using dotted lines are not actually displayed. A character inside an object indicates the content of data linked to the object. A line which connects objects indicates the order or subordinate relationship between the objects in a flowchart. For example, since a line AB (line connecting objects A and B) starts from the upper right corner of object A, it indicates that object A is the object preceding object B and that object B is the object following object A.

When a flowchart is drawn, a case often occurs where in addition to the addition and deletion of an object, a new object is inserted between objects previously connected. For example, a case occurs where a new object D is inserted between objects A and B. In this case, as shown in Fig. 1B, a line connecting objects A and B is deleted. When a line is deleted, two objects at either end of the line are designated or a line to be deleted is designated after a deletion process is called from a menu.

Then, as shown in Fig. 1C, a new object is

created, and the new object is linked to data D. A process for creating an object, for example, is called from a menu. Then, as shown in Fig. 1D, objects A and D are connected, and objects D and B are connected.

5 Then, in order to make the flowchart easy to understand, each object is appropriately moved, as shown in Fig. 1E. As a result, a state shown in Fig. 1F is obtained.

As described above, a process for inserting a new object between objects previously connected in a flowchart, etc., is a prior art. However, according to conventional application software, it requires much work for a user to operate in that kind of edit process, and the user often felt it was troublesome.

10 For example, in a example shown in Figs. 1A through 1F, a user must perform the following operations.

(a) Delete a line displayed in the position where a new object will be inserted.

(b) Connect an object previously displayed and a new object to be inserted.

20

(c) Re-locate the objects.

This problem becomes more serious in particular when a new object is inserted in a graphic where a connection relation between objects is complicated.

25 For example, a procedure in the case where a state

shown in Fig. 2E is generated by inserting object H between object A and objects B through G in the state shown in Fig. 2A is described. In this case, first, lines connecting object A and objects B through G are  
5 deleted one by one, as shown in Fig. 2B. Then, as shown in Fig. 2C, object H is created, and objects A and H are connected. Then, as shown in Fig. 2D, object H and objects B through G are connected one by one. Then, in order to make the graphic easy to understand,  
10 the objects are re-located, and as a result, a state shown in Fig. 2E is obtained.

In this way, as the number of lines to be deleted or the number of lines to be newly set increases, the amount of work and working time of a user also  
15 increase. The probability of errors which occur when a line is deleted or set, also increases.

This problem not only occurs in application software for drawing flowcharts, but it also occurs in software for drawing graphics and software for  
20 drawing circuit diagrams, etc.

#### **Summary of the Invention**

An objective of the present invention is to make operation simple in the case where another object is  
25 inserted between objects previously connected.

The graphic editing apparatus of the present invention comprises a display unit displaying a graphic including first and second objects connected with each other using a first connector, and an  
5 editing unit creating a second connector for connecting the first object and a third object, and a third connector for connecting the third object and the second object, when the third object is located in a predetermined position in relation to the first  
10 connector.

The display unit displays the first and second objects, and the first connector, for example, on the monitor of a computer. The third object is moved to a desired position on the monitor, for example, by a  
15 user operation.

When the second and third connectors are created by the editing unit, a state where the first, third and second objects are connected in this order is generated. That is to say, a state where the third  
20 object is inserted between the first and second objects is obtained.

As described above, the third object can be automatically inserted between the first and second objects by locating the third object in a  
25 predetermined position in relation to the first

connector.

The second and third connectors can be created independently from the first connector or the first connector can be used as the second or third  
5 connector.

The graphic editing apparatus in another aspect of the present invention comprises a display unit displaying a graphic including first and second objects connected with each other using a first  
10 connector, and an editing unit creating a second connector for connecting the first object and a third object, and a third connector for connecting the third object and the second object.

When the first connector is selected, for  
15 example, by a user operation, the first and second objects each connected to either end of the first connector are recognized. The editing unit creates the second and third connectors according to the recognition result. Therefore, the third object can  
20 be automatically inserted between the first and second objects by selecting the first connector.

#### **Brief description of the Drawings**

Figs. 1A through 1F explain the procedure in the  
25 case where a new object is inserted between objects



previously connected using a conventional method.

Figs. 2A through 2E explain the problem of the prior art.

Fig. 3 explains an example of an environment for  
5 the implementation of the present invention.

Figs. 4A through 4D explain the basic operation in the first preferred embodiment.

Figs. 5A and 5B explain a graphic editing method in the first preferred embodiment.

10 Figs. 6A through 6D are examples of tables provided by the graphic editing software in the first preferred embodiment.

Fig. 7 explains a method for designating a line.

Fig. 8A shows the state of an updated data table.

15 Fig. 8B shows the state of an updated line information table.

Figs. 9A through 9C show the state of an updated table in a process for inserting an object.

20 Fig. 10 is a flowchart showing a user operation in the first preferred embodiment.

Fig. 11 is a flowchart showing the outline of the operation of graphic editing software in the first preferred embodiment.

25 Fig. 12 is a detailed flowchart showing a process for detecting a designated line.

Fig. 13 is a flowchart showing a process for updating graphic data.

Fig. 14 is a detailed flowchart showing a process for setting a coordinate to display a new object.

5        Fig. 15 is a detailed flowchart showing a process for modifying a coordinate to display objects previously displayed.

Fig. 16 is a detailed flowchart showing a process for updating a line information table.

10       Figs. 17A and 17B are reference drawings used to explain the flowchart shown in Fig. 16.

Figs. 18A and 18B explains another concrete example of the editing method in the first preferred embodiment.

15       Fig. 19 shows an example of a graphic displayed on a monitor.

Fig. 20A shows an example of an object information table.

20       Fig. 20B shows an example of a line information table.

Fig. 21A explains a method for selecting a line.

Fig. 21B shows an example of a selection index table.

25       Figs. 22A and 22B explain a process for adding a record to a table.

Fig. 23 explains a process for updating an object information table (No. 1).

Fig. 24 explains a process for updating an object information table (No. 2).

5 Figs. 25A and 25B explain a process for updating a line information table (No. 1).

Fig. 26 explains a process for updating an object information table (No. 3).

10 Fig. 27 explains a process for updating a line information table (No. 2).

Figs. 28A and 28B show the state of a table after updating.

15 Fig. 29 shows a graphic drawn according to a table after it has been updated as shown in Figs. 28A and 28B.

Fig. 30 explains the relationship between an absolute coordinate system on a monitor and a virtual coordinate system used by graphic editing software.

20 Fig. 31 is a flowchart showing a process for updating graphic data.

Fig. 32 is a flowchart showing a process for setting data to display a new object.

25 Fig. 33 is a detailed flowchart showing a process for modifying a coordinate to display objects previously displayed, if necessary.

Figs. 34A through 34C explain the operation of the graphic editing method in the second preferred embodiment.

5 Figs. 35A through 35C explain another operation of the graphic editing method in the second preferred embodiment.

Figs. 36A through 36D explain a user operation according to a conventional editing method (No. 1).

10 Figs. 37A through 37B explain a user operation according to a conventional editing method (No. 2).

Fig. 38A shows an example of an object information table.

Fig. 38B shows an example of a line information table.

15 Fig. 39 explains the display coordinates of both an object and a line, etc.

Fig. 40 is a flowchart showing the user operation procedure of the editing method in the second preferred embodiment.

20 Fig. 41 is a flowchart showing the operation of the graphic editing software in the second preferred embodiment.

Fig. 42 is a detailed flowchart showing an object insertion process.

25 Fig. 43 shows the result of an object insertion

process.

Fig. 44 explains another display method.

Fig. 45 shows the result of the object insertion process according to another display method.

5 Figs. 46A through 46C shows an alternative in the second preferred embodiment.

Fig. 47 shows the configuration of a computer executing a program in which the process of the editing method of the present invention is described.

10 Fig. 48 explains how to provide a software program, etc. relating to the present invention.

#### **Description of the Preferred Embodiments**

15 The graphic editing method of the present invention relates to a method for editing a graphic, etc., displayed on the monitor of a computer 1, such as shown in Fig. 3. Although a graphic, etc., is basically edited by the user operation of a mouse 2, it can also be edited by inputting an instruction from  
20 a keyboard. For the following preferred embodiments, for example, the graphic editing method of the present invention is described below using a flowchart as its target. In a flowchart, a graphic unit corresponding to each step is handled as one "object".

25

The first preferred embodiment

Figs. 4A through 4D explain the basic operation in the first preferred embodiment of the present invention. Here, a graphic (flowchart) where object A, object B and object C are connected in this order is displayed, and a case where a newly created object D is inserted between objects A and B is explained. It is assumed that the graphic editing software of the first preferred embodiment provides a virtual coordinate system to display objects and that each object is displayed in the box of the coordinate system.

When object D is inserted between objects A and B in a state shown in Fig. 4A, a user first designates (or selects) a line AB, as shown in Fig. 4B. Since in this case, line AB starts from the upper right corner of object A, it is indicated that object A is the object preceding object B and that object B is the object following object A. A "line" is sometimes called a "connector".

A line, for example, can be designated by directly clicking on a desired line using a mouse or can be designated by way of range designation using a mouse. If a line is designated by way of range designation, a line within the designated range is

designated.

Then, the user creates an object to be inserted between objects A and B. A new object is created, for example, utilizing a function provided by graphic editing software. Graphic editing software usually has a function to create a new object according to a user instruction in its menu.

If a new object is created while line AB is designated, the new object is automatically inserted between objects A and B, as shown in Fig. 4C. At this time, line AB is deleted and simultaneously both a line connecting object A and the new object and a line connecting the new object and object B are automatically created. Thus, object A, the new object, object B and object C are connected in this order. Objects B and C are shifted in the rightward direction in Fig. 4C in such a way that the four objects, including the new object, are located in each box of the virtual coordinate system.

Then, the user sets information D in the new object. As a result, a state shown in Fig. 4D can be obtained.

In this way, according to the editing method in the first preferred embodiment, in order to insert a new object between the first and second objects

connected with each other, it is sufficient if a line connecting the first and second objects is designated and an object to be inserted is created. With these operations, a connection between the objects can be  
5 automatically updated, and the re-location of each object can also be performed.

Next, the detailed editing method in the first preferred embodiment is described. A case where a new object is inserted between objects A and B is  
10 described below. As shown in Fig. 5A, it is assumed that objects A and B are displayed at coordinates  $(X, Y) = (000, 000)$  and  $(X, Y) = (001, 000)$ . Objects A and B are connected with each other using line AB.

Figs. 6A through 6D are examples of tables  
15 provided by the graphic editing software in the first preferred embodiment. An object information table shown in Fig. 6A, a line information table shown in Fig. 6B and a data table shown in Fig. 6D indicate the display states of a graphic drawn using the graphic  
20 editing software in the first preferred embodiment. In other words, a graphic drawn using graphic editing software is displayed according to information stored in these tables. A selection index table shown in Fig. 6C is a working table, and it is used when a new  
25 object is inserted between objects previously



connected.

Fig. 6A shows an example of a typical object information table. "Array 1" is an identification number for identifying a displayed object. "Display information" is information displayed in each object. "Position information" is information for calling up detailed information about each object from a data table described later. When an object is created, a corresponding record is added to the object information table, and when an object is deleted, a corresponding record is deleted from the table.

Fig. 6B shows an example of a typical line information table. "Array 2" is an identification number for identifying a line connecting displayed objects. "Front information" is information for indicating an object located at the front side of each line. "Rear information" is information for indicating an object located at the rear side of each line. Both "front information" and "rear information" indicate objects using the values of the "array 1" in the object information table.

Fig. 6C typically shows an example of a selection index table. "Array 3" is an identification number for identifying a line designated by a user when a new object is inserted between objects previously

displayed. "Selection information" is information for calling up information about a line designated by a user. "Selection information" identifies a line using the value of "array 2" in the line information table.

5        Fig. 6D shows an example of a typical data table. "Array 4" is an identifier used to call up detailed information about each object from the object information table. "Data name" is information displayed in each object. "Preceding information" is  
10       information for specifying the preceding objects of each object. "X coordinate" and "Y coordinate" are coordinates in the X and Y axes of a position in which each object is displayed, and a virtual coordinate system is used in this preferred embodiment.

15       The contents of the tables shown in Figs. 6A, 6B, and 6D correspond to the display states of a graphic shown in Fig. 5A. Specifically, object A is registered in the record of "array 1 = 00" in the object information table shown in Fig. 6A. The detailed  
20       information of an object registered in this record is registered in the record of "array 4 = 31" in the data table. Therefore, (X, Y) = (000, 000) is obtained as a coordinate for displaying object A. (X, Y) = (001, 000) is obtained as a coordinate for displaying object  
25       B.

A line connecting an object registered in the record of "array 1 = 00" and an object registered in the record of "array 1 = 01" is registered in the line information table shown in Fig. 6B. In this example, objects A and B are registered in the record of "array 1 = 00" and the record of "array 1 = 01", respectively. Therefore, a line connecting objects A and B (line AB) is registered in the line information table shown in Fig. 6B. The fact that object A is the object preceding object B and that object B is the object following object A is indicated by the "front information" and "rear information" in Fig. 6B.

Next, a process in the case where a state shown in Fig. 5B is obtained by inserting a new object between objects A and B in a state shown in Fig. 5A, is described.

When a new object is inserted between objects A and B, a user first designates line AB connecting objects A and B. The designation method of a line is described with reference to Fig. 7.

A user designates a rectangle by using two desired points (points P and Q) using a mouse, etc. Four sides of this rectangle are expressed as follows.

$$x = x1 \quad (1)$$

$$x = x2 \quad (2)$$

$$x = y1 \quad (3)$$

$$x = y2 \quad (4)$$

A process for designating a rectangle by using two desired points utilizes a range designation function provided by, for example, a Windows system (Microsoft's operating system).

When the rectangle (hereinafter called a "selection range PQ") is designated, the graphic editing software checks whether there is a line passing through the selection range PQ. An equation specifying each line, for example, can be calculated when a user inputs a selection range PQ, or it can be registered in the line information table in advance as additional information. The equation of each line is generally expressed as follows.

$$y = ax + b \quad (5)$$

The graphic editing software checks whether there is any intersection point at which each line registered in the line information table and each of the straight lines indicated by equations (1) through (4) intersect. If there is the intersection point, it is checked whether the value in the y coordinate of the intersection point is located between the value (y1) in the y coordinate of point P and the value (y2) in the y coordinate of point Q. If so, the line is

considered to pass through the selection range PQ, and the line is registered in the selection index table. Therefore, in an example shown i Fig. 7, line AB is registered in the selection index table. A selection  
5 index table shown in Fig. 6C indicates a state in the case where line AB is designated in the state shown in Fig. 5A.

In this way, the graphic editing software detects a line which passes through the selection range and  
10 registers the detected line in the selection index table, when the selection range PQ is input by a user.

Then, the user inputs an instruction to create an object to be inserted between objects A and B. When this instruction is inputted, the graphic editing  
15 software adds a record corresponding to the object to be newly created, to both the object information table and the data table. In the example shown in Fig. 6, "array 1 = 02" and "array 4 = 32" are added to the object information table and the data table,  
20 respectively.

Then, the graphic editing software updates the tables in such a way that a newly created object is displayed in the position where object B is being displayed. First the graphic editing software acquires  
25 the display position of object B according the

following procedure.

(1) "Selection information = 10" in selection index table

(2) "Rear information = 01" of "array 2 = 10" in line information table

(3) "Position information = 30" of "array 1 = 01" in object information table

(4) "X coordinate" and "Y coordinate" of "array 4 = 30" in data table

Both "X coordinate = 001" and "Y coordinate = 000" are obtained according to this procedure. Then, the obtained "X coordinate" and "Y coordinate" are written in the record of "array 4 = 32" in the data table. As a result, the data table is updated to a state shown in Fig. 8A.

Then, the graphic editing software extracts from the data table a record in which the value of "X coordinate" is greater than the value of "X coordinate" in a record newly registered in "array 4 = 32" and in which the value of "Y coordinate" is the same as the value of "Y coordinate" in the record in "array 4 = 32". Then, "1" is added to the value of "X coordinate" in each extracted record. However, in the example shown in Figs. 5A and 5B, such a record is not extracted.

Then, the graphic editing software updates the tables to reset a line which connects objects. Specifically, first the software adds a record (array 2 = 11) for a line to be newly created, to the line information table. Then, the software accesses the line information table using the "selection information (= 10)" of a line registered in the selection index table as a key, and it writes the "rear information (= 01)" of a record obtained by the access process, in the line information table as the "rear information" of the newly added record. The software also writes the "array 1 (= 02)" of the newly added record in the object information table as the "rear information" of a record to be obtained by the access process. Further, the software writes the "array 1 (=02)" of the record newly added to the object information table as the "front information" of the record newly added to the object information table. By the process, the line information table enters a state shown in Fig. 8B.

Then, the tables are updated to shift object B in the rightward direction. The coordinate of object B is acquired according to the following procedure.

(1) "Rear information = 01" of "array 2 = 11" in line information table

(2) "Position information = 30" of "array 1 = 01"  
in object information table

(3) "X coordinate" and "Y coordinate" of "array  
4 = 30" in data table

5 Both "X coordinate = 001" and "Y coordinate = 000" are  
obtained according to this procedure, Then, "1" is  
added to the obtained "X coordinate".

As a result of the above mentioned process, the  
object information table, line information table and  
10 data table enter states shown in Fig. 9A, 9B, and 9C,  
respectively. Then, the graphic shown in Fig. 5B is  
obtained by displaying data according to these tables.  
The selection index table is deleted when the process  
has been completed.

15 Fig. 10 is a flowchart showing a user operation  
in a process for inserting a new object between  
objects in the first preferred embodiment. In step S1,  
a user designates (or selects) a line which connects  
objects. In step S2, the user creates a new object.  
20 The line designation method and object creation method  
are the same as those described above. In step S3,  
desired information is set in the new object created  
in step S2. This is performed by the input of a  
character string, etc., using a keyboard or by pasting  
25 data prepared in advance.



Fig. 11 is a rough flowchart showing the operation of the graphic editing software in the first preferred embodiment. A process in this flowchart is executed when the user designates a line.

5        In step S11, the line designated by the user is detected. In step S12, graphic data are updated. Graphic data at least include information registered in the tables shown in Fig. 6. Step S12 is executed when the user inputs an instruction to create a new  
10       object. In step S13, a graphic is displayed according to the graphic data updated in step S12.

Fig. 12 is a detailed flowchart showing the "detection of a line", and it corresponds to a process in step S11 shown in Fig. 11. A process in this  
15       flowchart is executed in order for each line registered in the line information table. That is to say, this process is executed for each displayed line.

In step S21, a line registered in the line information table is acquired, and an equation  
20       indicating the line is obtained. The equation of the line can be easily obtained using the prior art.

In step S22, it is checked whether the line acquired in step S21 passes through a selection range  
25       inputted by the user. A method used for this judgment is as described with reference to Fig. 7. If the line

passes through the selection range, a process in step S23 is executed, and if it does not, step S23 is skipped.

In step S23, a line passing through the selection  
5 range is registered in the selection index table. Specifically, a new record is added to the selection index table, and the value "array 2" corresponding to the line acquired in step S21 is written therein as the "selection information" of the newly added record.  
10 Step S24 is for returning to step S21 and acquiring the next line when there remains an unprocessed line in the line information table.

By the above-described process, the line  
designated by the user is registered in the selection  
15 index table. If the user designates a plurality of lines, the plurality of designated lines are registered in the selection index table.

Fig. 13 is a detailed flowchart showing the  
"updating of graphic data", and it corresponds to the  
20 process in step S12 shown in Fig. 11. A process in this flowchart is executed in order for each record registered in the selection index table. That is to say, this process is executed for each line designated by the user.

25 In step 31, data for drawing an object which is

to be newly created by a user instruction are loaded in the prescribed area of a memory. In step S32, a record for the new object is added to both the object information table and data table. In step S33, a  
5 record is extracted from the selection index table.

In step S34, it is checked whether the record extracted in step S33 is the first record in the selection index table. If it is, the process in step S35 is executed, and if it is not, step S35 is  
10 skipped.

In step S35, a coordinate is set to display the new object. In step S36, the coordinate of an object with a display position that is modified by the insertion of the new object, is updated. In step S37,  
15 information about a line with a connection relationship that is changed by the insertion of the new object, is updated. Each of the processes in steps S35 through S37 is described later in detail. Step S38 is for returning to step S33 and acquiring the next  
20 record when there remains an unprocessed record in the selection index table.

By the above-described process, data are set to display the new object. The coordinate of the display position of objects connected at the rear end of a  
25 line designated by the user, are updated. Further, a

line connecting objects is reset.

Fig. 14 is a detailed flowchart showing a process for setting a coordinate to display a new object, and it corresponds to the process in step S35 shown in Fig. 13. A process in the flowchart shown in Fig. 14 is executed only for the first record in the selection index table.

In step S41, the "selection information " of the first record in the selection index table is extracted. In step S42, the line information table is accessed using the "selection information" extracted in step S41 as a key, and "rear information" is extracted. In step S43, the object information table is accessed using the "rear information" extracted in step S42 as a key, and "position information" is extracted. In step S44, the data table is accessed using the "position information" extracted in step S43 as a key, and both "X coordinate" and "Y coordinate" are extracted. In step S45, both "X coordinate" and "Y coordinate" extracted in step S44 are set in the data table as "X coordinate" and "Y coordinate", respectively, of the new object.

Fig. 15 is a detailed flowchart showing a process for modifying a coordinate to display objects previously displayed, and it corresponds to the

process in step S36 shown in Fig. 13. A process in the flowchart shown in Fig. 15 is executed for each record registered in the selection index table.

Steps S41 through S44 are as described with reference to Fig. 14. However, in the description of the flowchart shown in Fig. 15, it is assumed that the "X coordinate" and "Y coordinate" obtained by the processes in steps S41 through S44 are called "Xa" and "Ya", respectively.

A process in steps S51 through S54 is executed for each record in the data table. In step S51, a record is acquired from the data table, and both "X coordinate" and "Y coordinate" are extracted from the record. It is assumed that "X coordinate" and "Y coordinate" extracted in step S51 are called "Xi" and "Yi", respectively.

In step S52, it is checked whether "Y coordinate (Ya)", extracted in step S44, and "Y coordinate (Yi)", extracted in step S51, are the same. If they are, step S53 is executed, and if they are not, steps S53 and S54 are skipped. In step S53, it is checked whether "X coordinate (Xi)", extracted in step S51, is greater than "X coordinate (Xa)", extracted in step S44. If "X coordinate (Xi)" is greater than "X coordinate (Xa)", step S54 is executed, and if not, step S54 is

skipped.

In step S54, "1" is added to "X coordinate ( $X_i$ )",  
 extracted in step S51. Step S55 is for returning to  
 step S51 and acquiring the next record when there  
 5 remains an unprocessed record in the data table.

By the above-described process, X coordinate is  
 modified to display objects connected at the rear end  
 of a line selected by the user. As a result, when a  
 graphic is drawn according to this updated data table,  
 10 the display positions of those objects are shifted in  
 the X direction.

Fig. 16 is a detailed flowchart showing a process  
 for updating the setting of a line with a connection  
 relationship that is modified, and it corresponds to  
 15 the process in step S37 shown in Fig. 13. A process  
 in the flowchart shown in Fig. 16 is executed for each  
 record registered in the selection index table.

In the description of the flowchart shown in Fig.  
 16, the example shown in Figs. 17A and 17B are used.  
 20 In this example, line AB is selected in a state shown  
 in Fig. 17A, and a new object is inserted between  
 objects A and B. As a result, a display state shown  
 in Fig. 17B is obtained. In this case, the "rear  
 information" of the selected line is changed from  
 25 "object B" to "new object". "New object" and "object

B" are set as the "front information" and "rear information", respectively, of the new line. Further, the display position of object B is shifted in the rightward (X) direction.

5           In step S61, data for displaying the new line are loaded in the prescribed area of a memory. At this time, a record for the new line is added to the line information table.

10           In step S62, the "rear information" of the selected line is set as the "rear information" of the new line. For example, in Fig. 17A, "object B" is connected at the rear end of the selected line. Therefore, in this case, "object B" is set as the "rear information " of the new line.

15           In step S63, the index of the new object is set as the "rear information" of the selected line. In step S64, the index of the new object is set as the "front information" of the new line. "Index" is, for example, an identification number for identifying an  
20           object, and corresponds to "array 1" of the object information table.

          Steps S65 through S67 are for shifting in the X direction an object existing in the position where a new object should be displayed. Specifically, in the  
25           example shown in Fig. 17A, steps S65 through S67 are

for shifting object B in the rightward direction.

In step S65, the "rear information" of the new line is extracted from the line information table. In step S66, the object information table is accessed using the "rear information" extracted in step S65 as a key, and a corresponding "position information" is extracted. In step S67, the data table is accessed using the "position information" extracted in step S66 as a key, and "X coordinate" is extracted. Then, "1" is added to the extracted "X coordinate".

Next, another concrete example of the editing method in the first preferred embodiment is described. An editing method in the case where a state shown in Fig. 18B is obtained by inserting a new object between objects A and B and simultaneously between objects A and D in a state shown in Fig. 18A, is described below.

Fig. 19 explains a display method for displaying a graphic on a monitor. Here, the graphic shown in Fig. 18A is displayed. In this preferred embodiment, a virtual coordinate system is used. Specifically, the display positions of all objects composing a graphic are given in terms of a virtual coordinate. For example, the display position of object A is given as  $(X, Y) = (0, 0)$  in the virtual coordinate system.



Fig. 20A shows an example of the object information table. The object information table stores information about displayed objects. The object information table shown in Fig. 20A indicates the display state shown in Fig. 19. Specifically, object numbers "1" through "7" are assigned to objects A through G, respectively. The object information table also stores the coordinates of the display positions of objects. "Array 1 (index)" is a number for specifying each record in the object information table, while "object number" is a number for identifying each displayed object. Therefore, both the numbers are not always the same.

Fig. 20B shows an example of the line information table. The line information table stores information about displayed lines. A line information table shown in Fig. 20B indicates the display state shown in Fig. 19. Specifically, "1" through "6" are assigned to the displayed lines as line numbers (connecting line numbers), respectively. The line information table also stores both "front information" for specifying objects connected at the front end of a line and "rear information" for specifying objects at the rear end of a line. "Array 2 (index)" is a number for specifying each record in the line information table,

while "line number" is a number for identifying each displayed line. Therefore, both the numbers are not always are the same.

When inserting a new object both between objects  
5 A and B and between objects A and D in the state shown in Fig. 19, a user selects both a line connecting objects A and B, and a line connecting objects A and D by way of range designation using a mouse, etc. Specifically, lines 1 and 3 are selected.

10 The graphic editing software detects the lines selected by the user. A method for detecting the lines is as described above with reference to Fig. 7. Then, the lines selected by the user are registered in the selection index table shown in Fig. 21B. "Registration  
15 position" registered in the selection index table is an "index (array 2)" used for extracting information about the relevant line from the line information table.

Then, the user creates a new object to be  
20 inserted in the above-described position. When receiving an instruction to create the new object, the graphic editing software first loads both data used to draw a new object and data used to draw lines newly required to insert the new object, in a prescribed  
25 area in a memory. Then, as shown in Fig. 22A, a record

for the new object is added to the object information table. As shown in Fig. 22B, a record for the new line is also added to the line information table.

The graphic editing software performs the following process for a line registered in the first record of the selection index table.

First, as shown in Fig. 23, "selection position" is extracted from the first record of the selection index table, and the line information table is accessed using the "selection position" as a key. "Selection position" indicates the "index" of the line information table. Therefore, information about line 1 is obtained by the access. Then, the "rear information" of line 1 is extracted, and the object information table is accessed using the "rear information" as a key. "Rear information" indicates the "index" of the object information table. Thus, information about object B is obtained by this access. Then, both "X coordinate" and "Y coordinate" of object B are extracted and are written in the record of the new object.

By the above-described process, the coordinate on which object B is being displayed is obtained as a coordinate for the new object.

Then, as shown in Fig. 24, "1" is added to "X

coordinate" of object B and "X coordinate" of object C. Objects B and C are objects connected to the rear side of line 1 (the right side of line 1 in Fig. 19) selected by the user.

5           Specifically, this addition process first extracts both "X coordinate" and "Y coordinate" of an object which are specified as "rear information" of line 1 stored in the line information table, from the object information table. In this example, (X, Y) =  
10       (001, 000) is obtained as the coordinate of object B. Then, a record in which both "X coordinate  $\geq$  001" and "Y coordinate = 000" are satisfied, is searched for in the object information table, and "1" is added to the "X coordinate" of the extracted record. As a  
15       result, the coordinate of object B is updated to (X, Y) = (002, 000), and the coordinate of object C is updated to (X, Y) = (003, 000). The record for the new object is excluded from the search targets.

By the above-described process, coordinates  
20       representing objects B and C are updated sequentially.

After this addition process, an index indicating a record for the new object in the object information table is written in the line information table as "rear information " of the new line. Specifically, an  
25       index indicating the new object is set as "rear

information" of the new line.

Then, as shown in Fig. 25A, "front information" is extracted from a record in the line information table designated by "selection position" of the first record in the selection index table, and is written in "front information " of the new line. Specifically, "1", which is "front information " of line 1, is written in "front information " of the new line in the line information table.

Further, as shown in Fig. 25B, "rear information" of the new line is written as "front information" of a record in the line information table which is designated by "selection position" of the first record in the selection index table. Specifically, "8", which is "rear information" of the new line, is written in "front information" of line 1 in the line information table.

By the above-described process, both information indicating that object A is connected to the front end of the new line and information indicating that a new object is connected to the front end of line 1 selected by the user are registered in the line information table.

Then, the graphic editing software performs the following process for lines registered in the second

and subsequent records of the selection index table.  
A process for the second record is described here.

First, as shown in Fig. 26, "selection position" is extracted from the second record in the selection index table, and the line information table is accessed using the "selection position" as a key. With this access process, information about line 3 is obtained. Then, "rear information" of line 3 is extracted from the line information table, and the object information table is accessed using the "rear information" as a key. With this access process, information about object D is obtained. Then, "1" is added to both "X coordinate" of object D and "X coordinate" of object E. Objects D and E are objects connected to the rear side of line 3 selected by the user.

This addition process is basically the same as the procedure described with reference to Fig. 24. Specifically, first, both "X coordinate" and "Y coordinate" of an object which are specified as "rear information" of line 3 stored in the line information table, are extracted from the object information table. In this example,  $(X, Y) = (001, 001)$  is obtained as the coordinate of object D. Then, a record in which both "X coordinate  $\geq 001$ " and "Y coordinate

= 001" are satisfied, is searched for in the object information table, and "1" is added to "X coordinate" of the extracted record. As a result, the coordinates of objects D and E are modified to  $(X, Y) = (002, 001)$  and  $(X, Y) = (003, 001)$ , respectively. The record for the new object is excluded from the search targets.

Further, as shown in Fig. 27, "rear information" of the new line is written as "front information" of a record in the line information table which is designated by "selection position" of the second record in the selection index table. Specifically, in the line information table, "8", which is "rear information" of the new line, is written in "front information" of line 3.

With the process described above with reference to Figs. 22 through 27, the object information table and the line information table are updated to the states shown in Figs. 28A and 28B, respectively. The selection index table is deleted when the above-described process has been completed.

Fig. 29 shows a graphic drawn according to a table after the updates shown in Figs. 28A and 28B have been made.

Since the first record in the object information table is not updated, object A is displayed at the  $(X,$

Y) = (001, 000). The new object is displayed at the  
 (X, Y) = (001, 000) according to information stored  
 in the eighth record of the object information table.  
 A new line connecting object A and the new object is  
 5 displayed according to information stored in the  
 seventh record in the line information table.

Since "X coordinate", corresponding to objects  
 B through E in the object information table, is  
 increased by "1", objects B through E are displayed  
 10 in a position shifted "1" in the rightward direction,  
 with reference to the state shown in Fig. 19. Since  
 "front information" of lines 1 and 3 both are modified  
 from "1" to "8" in the line information table, line  
 1 is displayed so as to connect the new object and  
 15 object B, and line 3 is displayed so as to connect the  
 new object and object D. As a result, the graphic  
 shown in Fig. 18B is obtained.

Fig. 30 explains the conversion relationship  
 between an absolute coordinate system on a monitor and  
 20 a virtual coordinate system used by the graphic  
 editing software. Here, "height of each box" and  
 "width of each box" of the virtual coordinate system  
 are converted to "a" and "b", respectively, in the  
 absolute coordinate system. "Offset from each origin  
 25 to the left end of an object displayed in the box" and



"offset from each origin to the top of an object displayed in the box" are converted to "c" and "d", respectively, in the absolute coordinate system. Further, "width of each object" is converted to "e" in the absolute coordinate system.

If the above-described conversion relationship is used, the display position of an object with a coordinate in the virtual coordinate system that is  $(X, Y) = (n, m)$  is expressed as follows in the absolute coordinate system.

x coordinate of the left end of the object =  $nb+c$

y coordinate of the top of the object =  $ma+d$

The starting point of a line is expressed as follows in the absolute coordinate system.

x coordinate of the starting point of a line =  $nb+c+e$

y coordinate of the starting point of a line =  $ma+d$

Next, the editing method shown in Figs. 18 through 29 is described in detail with reference to flowcharts. User operations are the same as the procedure shown in Fig. 10. Since the simplified flowchart is as shown in Fig. 11, it is omitted here. Further, a process for detecting a line selected by the user and registering it in the selection index

table is basically the same as the procedure given in the flowchart shown in Fig. 12.

Fig. 31 is a detailed flowchart of "update of graphic data", and corresponds to the process in step S12 shown in Fig. 11. A process in this flowchart is executed for each record registered in the selection index table in order. That is to say, this process is executed for each line designated by the user.

In step S71, data for drawing a new object and a new line are loaded in a predetermined area of a memory. In step S72, a record for the new object and a record for the new line are added to the object information table and the line information table, respectively.

Steps S73 and S77 are for sequentially extracting records from the selection index table and one by one. In step S74, it is checked whether the record extracted in step S73 is the first record in the selection index table. If it is the first record, a process in step S75 is executed, and if it is not, step S75 is skipped.

Step S75 is for setting data to display a new object. Step S76 is a coordinate conversion process which is required when a new object is inserted. A process in steps S75 and S76 is described in detail

later.

With the above-described process, data for displaying a new object are set. The coordinate of the display position of objects connected to the rear side of a line designated by a user is updated. Further,  
5 a line connecting objects with each other is reset.

Fig. 32 is a detailed flowchart showing a process for setting data for displaying a new object, and it corresponds to the process in step S75 shown in Fig. 31. A process in this flowchart is executed only for the first record in the selection index table.  
10

In step S81, both "X coordinate" and "Y coordinate" of a new object are set in the object information table. This process is the same as the process in steps S41 through S45 of the flowchart shown in Fig. 14.  
15

In step S28, the new object is set as "rear information" of a new line. Specifically, "index" for identifying a record for the new object in the object information table, is written in the line information table as "rear information" of the new line.  
20

In step S83, a object connected to the front end of a line selected by a user is set as "front information of the new line. Specifically, in the line information table, "front information" of a line  
25

specified by "selection position" stored in the first record of the selection index table is written in "front information" of the new line.

In step S84, "rear information" of the new line  
5 is set as "front information" of a line corresponding to the first data in the selection index table. Specifically, in the line information table, "rear information" of the new line is written as "front information" of a line specified by "selection  
10 position" stored in the first record of the selection index table.

Fig. 33 is a detailed flowchart showing a process for modifying a coordinate for displaying objects previously displayed, if necessary, and it corresponds  
15 to the process in step S76 shown in Fig. 31. A process in this flowchart is executed for each record registered in the selection index table.

In step S91, it is checked whether a record to be processed is the first record in the selection  
20 index table. If it is, in step S92, the coordinate of the new object is extracted from the object information table. If it is not, in step S93, the coordinate of an object connected to the rear end of the line is extracted. In the following description,  
25 the coordinate extracted in step S92 or S93 is assumed

to be (Xa, Ya).

Steps S94 and S99 are for sequentially extracting records (excluding a record for the new object) registered in the object information table one by one and executing steps S95 through S98 for each extracted record.

In step S95, the coordinate of an object with a record that is extracted in step S94, is obtained. In the following description, this coordinate is assumed to be (Xi, Yi). In step S96, it is checked whether "Ya = Yi" is satisfied. If it is, step S97 is executed, and if it is not, steps S97 and S98 are skipped. In step S97, it is checked whether " $X_i \geq X_a$ " is satisfied. If it is, step S98 is executed, and if it is not, step S98 is skipped. Then, in step S98, "1" is added to "X coordinate" obtained in step S95.

After steps S96 through S98 are executed for all records (excluding a record for the new object), the flow proceeds to step S100. In step S100, "rear information" of the new line is set as "front information" of a line specified by the selection index table.

In this preferred embodiment, since a graphic drawn according to a rule stating that if the second object is subordinated to the first object, the second

object is connected to the right side of the first object, is used, the second object is laterally shifted when the third object is inserted between the first and second objects. However, the present invention is not limited to this configuration. For example, if a graphic, drawn according to a rule stating that if the second object is subordinated to the first object, the second object is connected to the bottom of the first object, is used, the second object can also be moved downward when the third object is inserted between the first and second objects.

In this case, the direction in which an object is moved is judged by comparing the coordinates of two objects, each connected to the front end and rear end of a line selected by a user. For example, if the Y coordinates of two objects, each connected to the front end and rear end of a line selected by a user are the same, the object connected to the rear end of the line is moved laterally, and if their X coordinates are the same, the object connected at the rear end of the line is moved downward. In order to vertically move an object, it is sufficient if its "Y coordinate" is modified in the object information table.

The second preferred embodiment

According to the above-described editing method in the first preferred embodiment, a user must directly designate a line displayed in the position where a new object is to be inserted. However, according to the second preferred embodiment, the user does not have to directly designate the line, and he or she can insert the object between desired objects by moving an object to be inserted to a prescribed target position.

Figs. 34A through 34C explain the operation of the graphic editing method in the second preferred embodiment. Here, an operation in the case where object D is inserted between objects A and B in a flowchart where objects A through C are connected in series is described.

As shown in Fig. 34A, the user first drags object D using a mouse, etc., and as shown in Fig. 34B, drops object D so as to overlap line AB which connects objects A and B. Upon detecting the overlapping of line AB and object D, as shown in Fig. 34C, the graphic editing software connects objects A and D, and simultaneously connects objects D and B.

The connection is conducted using a connector object. This insertion process deletes line AB

(connector object) and generates two new connector objects (a connector object for connecting objects A and D and a connector object for connecting objects D and B). Line AB can also be replaced with either of  
5 the two connector objects without deleting line AB. In this case, the connector object can be connected at any point on the outer circumference of an object.

It is preferable that each object has a predetermined point at which a line should be  
10 connected. For example, for an rectangular object, such as object A, a line is connected at the mid-point of the long side of a rectangle. For a rhombus, such as object D, a line can be connected at its arbitrary vertex.

15 Figs. 35A through 35C explain another operation of the graphic editing method in the second preferred embodiment. Here, as shown in Fig. 35A, it is assumed that a distance (longitudinal length)  $a$  between objects A and B is not sufficient compared with the  
20 height  $h$  of object D. In this case, as shown in Fig. 35B, if object D is dropped so as to overlap line AB connecting objects A and B, the graphic editing software automatically expands the distance between objects A and B, and inserts object D between them.  
25 In this example, the distance between objects A and



B is expanded by moving object B downward. A process for connecting objects A and D and simultaneously connecting objects D and B is the same as the process shown in Fig. 34. As a result, a state shown in Fig. 35C is obtained.

In this way, according to the editing method in the second preferred embodiment, when a user wants to insert a new object between the first and second objects connected with each other, it is sufficient to move the new object to be inserted so as to overlap a line connecting the first and second objects. With this operation, a line between objects is automatically reset, and each object is re-located, if necessary.

If a job similar to the editing job shown in Figs. 34A through 34C is performed using the conventional graphic editing software, for example, as that shown in Figs. 36A through 36D ( Microsoft's Power Point 97), job for deleting line AB, job for moving object D and job for connecting objects is required, and thereby the burden on a user dramatically increases. In some conventional editing methods such that as shown in Figs. 37A and 37B (Visio Professional 5.0 for Microsoft Windows), a line is transformed as an object is moved. However, even in

this case, since finally a user must reset the line, it cannot be said that the burden on a user is reduced.

Fig. 38A is an example of an object information table. The object information table stores the coordinate of the displayed position of each object, information about the shape of the object, etc. As "coordinate", as shown in Fig. 39, the absolute coordinate located at the upper left corner of each object is stored. For "shape", information for identifying graphic components provided by application software is used. The application software provides a rectangle, a rhombus, a circle, etc., as graphic components. As specific information for indicating the shape of each object, "height" and "width" of the object are stored.

Fig. 38B shows an example of the line information table. The line information table stores information for specifying the display position and shape of each line and information for indicating the connection relationship between objects. "Starting point" and "end point" are the coordinate of the starting point and the coordinate of the end point of each line, respectively. "Front information" and "rear information" are the same as the front and rear

information described in the first preferred embodiment, and is information for specifying an object connected at the front end of each line and information for specifying an object connected to the rear end of each line, respectively. A connecting point of each line and an object on the front side is "starting point coordinate", and a connecting point of each line and an object on the rear side is "end point coordinate". "Height" indicates a difference between the Y coordinate of the starting point and the Y coordinate of the end point of each line.

The subordinate relationship between objects is managed using this line information table. For example, in a table shown in Fig. 38B, the fact that object B is subordinated to object A is registered.

Fig. 40 is a flowchart showing the user operation procedure of the editing method in the second preferred embodiment. In step S201, a new object to be inserted is created. A method for creating an object is the same as the method described in the first preferred embodiment. In step S202, the new object created in step S201 is moved to a desired position using a mouse, etc. Specifically, for example, the new object is dropped in the desired position as shown in Fig. 34B. In this way, according

to the editing method in the second preferred embodiment, the burden on a user is further reduced compared with that of in the first embodiment.

Fig. 41 is a flowchart showing the operation of the graphic editing software in the second preferred embodiment. A process in this flowchart is executed when a user creates a new object. Specifically, this process starts when step S201 in the flowchart shown in Fig. 40 is executed. This process is described below using an example of process for inserting object C between objects A and B connected with each other using line D.

In step S211, a record for object C created by a user is added to the object information table. In step S212, information about object C is written to the record added in step S211. In the example shown in Fig, 38A, "coordinate = (Mx, My)", "shape = rectangle", "height = MH", and "width = MW" are written in the record of "index = 3".

In step S213, when the user moves object C, the coordinate of object C is updated according to the move instruction. In step S214, it is checked whether a line overlapped by object C exists. In this judgment, "coordinate", "height" and "width" of object C, and "starting point coordinate", "end point

coordinate", and "height" of each line stored in the line information table are used.

If a line overlapped by object C exists, in step S215, an object insertion process is executed, and if not, in step S216, object C is drawn according to modified coordinates.

Fig. 42 is a detailed flowchart showing an object insertion process. This process corresponds to step S215 shown in Fig. 41.

In step S221, "height" of a line which overlaps object C by the user operation is acquired. In this preferred embodiment, "height of line = LH" is obtained from the line information table. In step S222, "height" of object C is acquired. In this preferred embodiment, "height of object = MH" is obtained from the object information table.

In step S223, it is checked whether "height" of a line acquired in step S221 is sufficiently great compared with "height" of an object acquired in step S222. Specifically, it is checked whether the following condition is satisfied.

$$LH > MH + 2\alpha$$

Wherein " $\alpha$ " is the minimum value of a line length, which is predetermined.

If this condition is not satisfied, it is judged

that sufficient space to insert object C does not exist, and a process in step S224 is executed. If the condition is satisfied, step S224 is skipped.

5 In step S224, an object in the vicinity is moved such that object C will be inserted. In this preferred embodiment, a coordinate for displaying object B is modified. In step S225, information about object C is updated. Specifically, a record for object C is updated in the object information table.

10 In step S226, a new line is created. Specifically, first, a record for the new line (in this preferred embodiment, line E connecting objects A and C) is added to the line information table, and a variety of information is set in the record. In step  
15 S227, the setting of the line in the vicinity is updated. In this preferred embodiment, the setting is modified in such a way that line D which connected objects A and B newly connects objects C and B. Specifically, "connection information (front  
20 information and/or rear information)", "coordinate (starting point coordinate and/or end coordinate)" and "height" are modified in the line information table, if necessary.

25 In step S228, a graphic is drawn according to both the object information table and line information

table updated in steps S224 through S227.

Next, a specific process in steps S224 through S227 is described using the display state shown in Fig. 39.

5 (1) Setting of object B

$$\text{New } Qx = Qx$$

$$\text{New } Qy = Lsy + MH + 2\alpha$$

(2a) Setting of object C (when object B is not moved)

$$Mx = Px + ((Qx - Px))/2$$

10  $My = Lsy + (LH/2) - (MH/2)$

(2b) Setting of object C (when object B is moved)

$$Mx = Px + ((Qx - Px))/2$$

$$My = Lsy + \alpha$$

15 (3a) Setting of a new line E (when object B is not moved)

$$NSx = LSx$$

$$NSy = Lsy$$

$$NH = (LH/2) - (MH/2)$$

$$NEx = Mx + (MW/2)$$

20  $NEy = My$

(3b) Setting of a new line E (when object B is moved)

$$NSx = LSx$$

$$NSy = Lsy$$

$$NH = \alpha$$

25  $NEx = Mx + (MW/2)$

$$NEy = My$$

(4a) Setting of a new line D (when object B is not moved)

$$\text{New LSx} = Mx + (MW/2)$$

$$5 \quad \text{New LSy} = My + MH$$

$$\text{New LH} = (LH/2) - (MH/2)$$

$$\text{New LEx} = LEx$$

$$\text{New LEy} = LEy$$

(4b) Setting of a new line D (when object B is moved)

$$10 \quad \text{New LSx} = Mx + (MW/2)$$

$$\text{New LSy} = My + MH$$

$$\text{New LH} = \alpha$$

$$\text{New LEx} = LEx$$

$$\text{New LEy} = \text{New Qy}$$

15      Fig. 43 shows a graphic displayed according to the object information table and line information table which was updated by the above-described operation.

20      Although in the preferred embodiment shown in Figs. 38 through 43, the position of each object is indicated using the coordinate at the upper left corner of the object, the present invention is not limited to this method. For example, as shown in Fig. 44, the position of each object can also be indicated

25      using the coordinate at the center of the object. In



this case, the operation in steps S224 through S227 shown in Fig. 42 becomes as follows. Point P, point Q and point M are the central points of objects A, B and C, respectively.

5 (1) Setting of object B

$$\text{New } Qx = Qx$$

$$\text{New } Qy = LSy + MH + 2\alpha$$

(2a) Setting of object C (when object B is not moved)

$$Mx = Px + ((Qx - Px)/2)$$

10  $My = LSy + (LH/2)$

(2b) Setting of object C (when object B is moved)

$$Mx = Px + ((Qx - Px)/2)$$

$$My = LSy + \alpha$$

15 (3a) Setting of a new line E (when object B is not moved)

$$NSx = LSx$$

$$NSy = LSy$$

$$NH = (LH/2) - (MH/2)$$

$$NEx = Mx$$

20  $NEy = My - (MH/2)$

(3b) Setting of a new line E (when object B is moved)

$$NSx = LSx$$

$$NSy = LSy$$

25  $NH = \alpha$

$$NEx = Mx$$

$$NEy = My - (MH/2)$$

(4a) Setting of a new line D (when object B is not moved)

5           New LSx = Mx

$$\text{New LSy} = My + (MH/2)$$

$$\text{New LH} = (LH/2) - (MH/2)$$

$$\text{New LEx} = LEx$$

$$\text{New LEy} = LEy$$

10       (4b) Setting of a new line D (when object B is moved)

$$\text{New LSx} = Mx$$

$$\text{New LSy} = My + (MH/2)$$

$$\text{New LH} = \alpha$$

$$\text{New LEx} = LEx$$

15           New LEy = New Qy

Fig. 45 shows a graphic displayed according to the object information table and line information table which was updated by the above-described operation.

20           In the preferred embodiment shown in Figs. 34A through 34C and Figs. 35A through 35C, after it is detected that an object has been dropped on a line, an insertion process is executed. However, the second preferred embodiment is not limited to this method.

25           For example, as shown in Figs. 46A through 46C, a

system can also be configured such that if it is detected that a new object (object D) has been dropped in the vicinity of line AB, the new object can be inserted between objects A and B. Alternatively, if  
5 it is detected that an object has been dragged (not dropped) on or into the vicinity of the line, the above-described insertion process can be executed. In this case, while an object is located on or in the vicinity of the line, the shape of a line object newly  
10 created varies depending on the position of the object.

In each example of the first and second preferred embodiments, a case where a new object is inserted in a graphic previously displayed has been described.  
15 However, the present invention is not limited to this. For example, the editing method of the present invention also includes an operation for moving object C between objects A and B in a graphic where objects A, B, and C are connected in alphabetical order.

20 In the above-described example, a description is given using a flowchart as an example of a graphic to be edited. However, the present invention is not also limited to this, and it includes a method for editing a graphic, etc., in which a plurality of objects are  
25 connected or linked with each other using a line or

connector. For example, the present invention can also be applied to a method for drawing and editing a circuit diagram. In this case, each element composing a circuit is an "object", and a signal line connecting the elements is a "line".

Although a state in which one object is connected to the front (front of object A) or rear (rear of object B) of an object to be inserted is shown in Figs. 34 and 35, two or more objects can be connected instead of one. In the case of a flowchart, this means the branching of a flow, and in the case of a circuit it means that two or more circuit elements are connected. This connection relationship is managed using the object information table and the line information table shown as an example in Fig. 38, in the same way as in the above-described connection relationship. In this case, an insertion process is executed while maintaining the connection relationship.

The graphic editing function of the present invention is realized by enabling a computer to execute a program which describes the process shown in the above-described flowchart. Fig. 47 shows the configuration of a computer 10 which executes the program.

A CPU (central processing unit) 11 loads a program which describes the process in the above-described flowchart from a storage device 12 to a memory 13, and executes it. The storage device 12 is, for example, a hard disk, and it stores the program. The memory 13 is, for example, a semiconductor memory, and it is used for the working area of the CPU 11. A variety of tables are created in this memory 13.

A storage medium driver 14 accesses a portable storage medium 15 according to the instruction of the CPU 11. The portable storage medium 15 includes a semiconductor device (IC card or PC card, etc.), a medium in which information is inputted and outputted by way of a magnetic function (floppy disk, magnetic tape, etc.) and a medium in which information is inputted and outputted by way of an optical function (optical disk, etc.). A communication control device 16 transmits and receives data to or from a network according to the instruction of the CPU 11.

Fig. 48 explains how to provide a software program relating to the present invention, etc. The program relating to the present invention is, for example, arbitrarily provided for by one of the following three methods.

(a) The program is pre-installed in the computer

10 and is provided. In this case, a program, etc., is, for example, installed prior to shipment.

(b) The program is stored in a portable storage medium and is provided. In this case, the program, etc., stored in the portable storage medium 15 is installed in the storage device 12 through the storage medium driver 14.

(c) The program is provided by a server on the network. In this case, the computer 10 acquires the program, etc., by downloading the program, etc., stored in the server.

Since a process in the case where another object is inserted between objects connected with each other is simplified in a process for drawing and editing a graphic, etc., using a computer while displaying the graphic, etc., the burden on a user can be reduced, thereby improving the work efficiency. In addition, the possibility of a mistake occurring when a graphic is edited, can also be reduced.

**What is claimed is:**

1. A graphic editing apparatus, comprising:  
a display unit displaying a graphic including a  
5 first object and a second object which are connected  
with each other using a first connector; and  
an editing unit, when a third object is located  
in a predetermined position in relation to the first  
connector, creating a second connector for connecting  
10 the first object and the third object and a third  
connector for connecting the third object and the  
second object.
2. The graphic editing apparatus according to claim  
15 1, wherein when the first connector and the third  
object overlap each other, said editing unit creates  
the second and third connectors.
3. The graphic editing apparatus according to claim  
20 1, further comprising:  
a judgment unit judging whether a distance  
between the first object and the second object is  
sufficient to accommodate the third object between  
them; and  
25 a shift unit, if the distance is not sufficient,

shifting at least one of the first and second objects.

4. The graphic editing apparatus according to claim 1, further comprising a management unit managing a subordinate relationship between objects, and

5 the management unit, if the second object is subordinated to the first object before the third object is inserted between the first object and the second object, subordinating the third object to the first object and subordinating the second object to the third object.

5. A graphic editing apparatus, comprising:

15 a display unit displaying a graphic including a first object and a second object which are connected with each other using a first connector; and

20 an editing unit, when the first connector is selected, creating a second connector for connecting the first object and the third object and a third connector for connecting the third object and the second object.

6. The graphic editing apparatus according to claim 5, wherein said editing unit shifts the second object, and displays the third object in a position where the



second object was displayed before the first connector is selected.

7. The graphic editing apparatus according to claim  
5, further comprising a coordinate system providing  
unit providing a virtual coordinate system in which  
each box is defined as area for displaying one object,  
wherein

said display unit displays each object using the  
10 virtual coordinate system, and said editing unit  
locates each object using the virtual coordinate  
system.

8. A graphic editing apparatus, comprising:

15 a display unit displaying a first object, a  
plurality of second objects and a plurality of first  
connectors for connecting the first object and the  
plurality of second objects; and

an editing unit, when one or more of the  
20 plurality of first connectors are selected, creating  
a second connector for connecting the first object and  
the third object, and one or more third connectors for  
connecting one or more of the second objects connected  
to the selected first connector and the third object.

25

9. A graphic editing method, comprising:

displaying a graphic including a first object and a second object which are connected with each other using a first connector; and

5 when a third object is located in a predetermined position in relation to the first connector, creating a second connector for connecting the first object and the third object and a third connector for connecting the third object and the second object.

10

10. A graphic editing method:

displaying a graphic including a first object and a second object which are connected with each other using a first connector; and

15 when the first connector is selected, creating a second connector for connecting the first object and the third object and a third connector for connecting the third object and the second object.

20 11. A storage medium on which a program enabling a computer to execute a process is stored, the process comprising:

displaying a graphic including a first object and a second object which are connected with each other  
25 using a first connector; and

when a third object is located in a predetermined position in relation to the first connector, creating a second connector for connecting the first object and the third object and a third connector for connecting  
5 the third object and the second object.

12. A storage medium on which a program enabling a computer to execute a process is stored, the process comprising:

10 displaying a graphic including a first object and a second object which are connected with each other using a first connector; and

when the first connector is selected, creating a second connector for connecting the first object and  
15 the third object and a third connector for connecting the third object and the second object.

**Abstract of the Disclosure**

A flowchart including objects A through C is displayed on the monitor of a computer. If an object  
5 D is inserted between objects A and B, object D is dropped on a line AB. By this operation, objects A and D are automatically connected, and objects D and B are automatically connected.

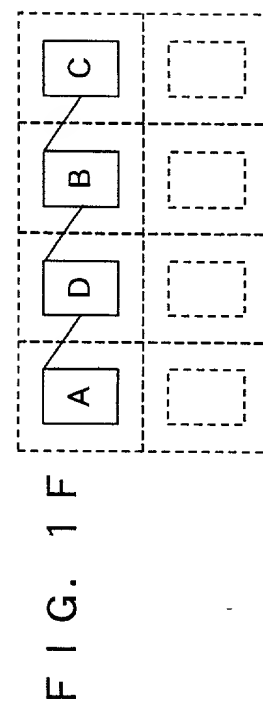
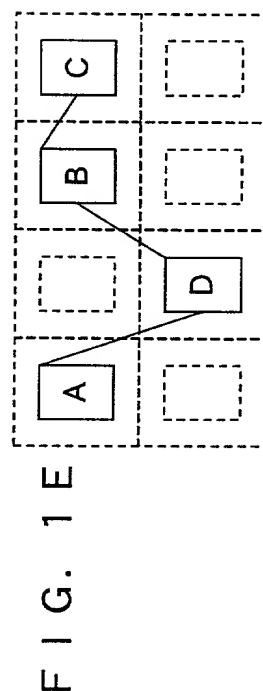
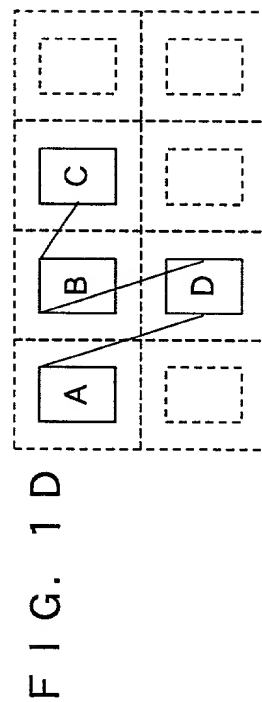
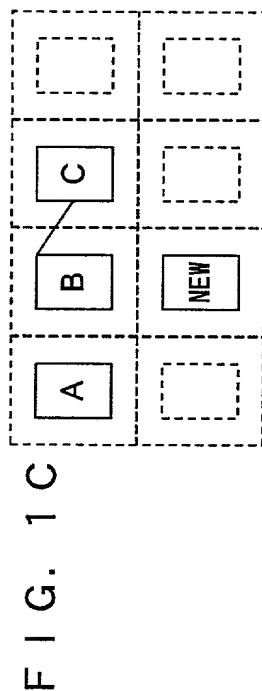
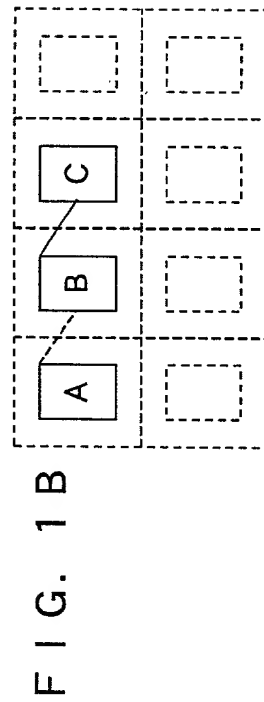
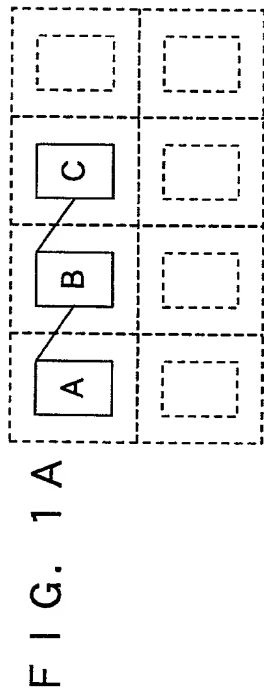


FIG. 2A

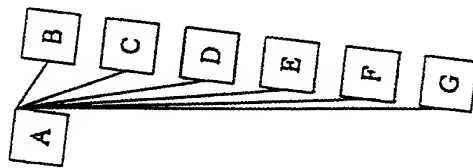


FIG. 2B

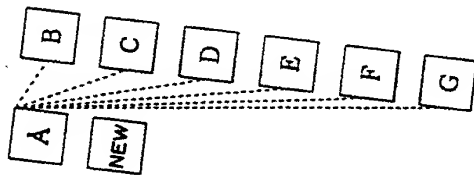


FIG. 2C

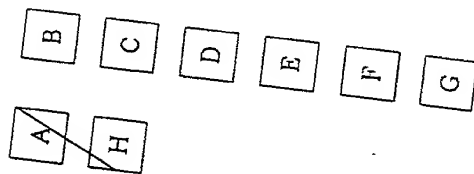


FIG. 2D

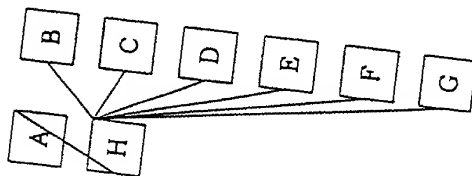
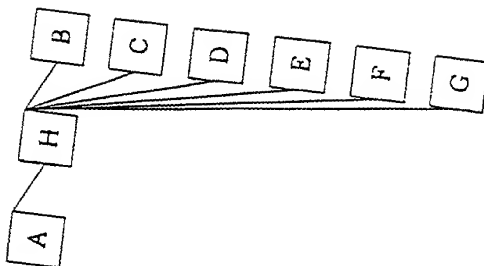


FIG. 2E



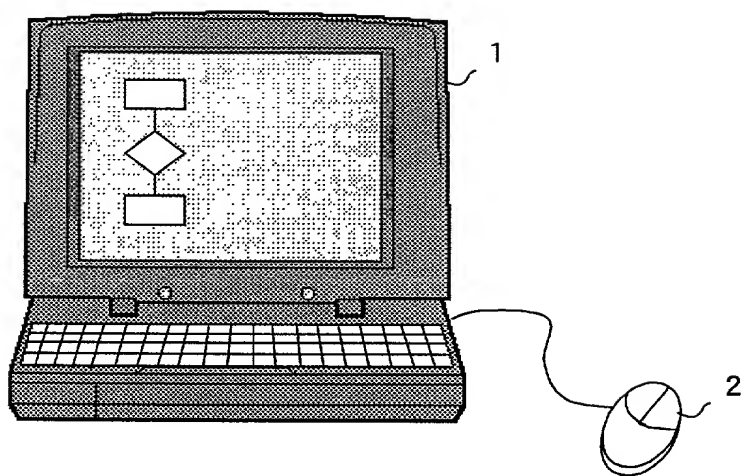


FIG. 3

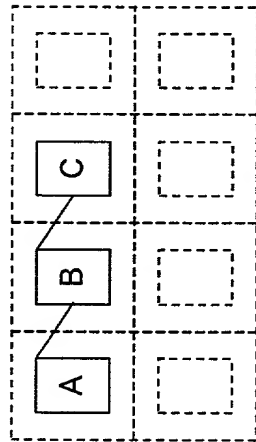


FIG. 4A

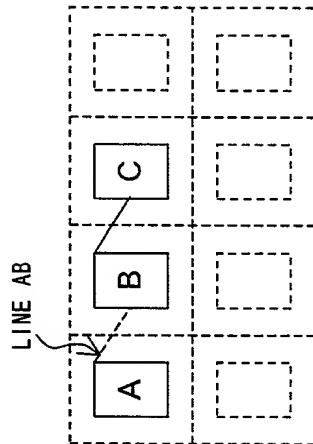


FIG. 4B

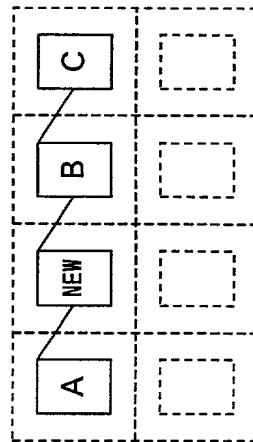


FIG. 4C

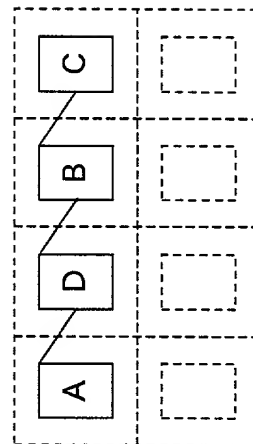


FIG. 4D



FIG. 5A


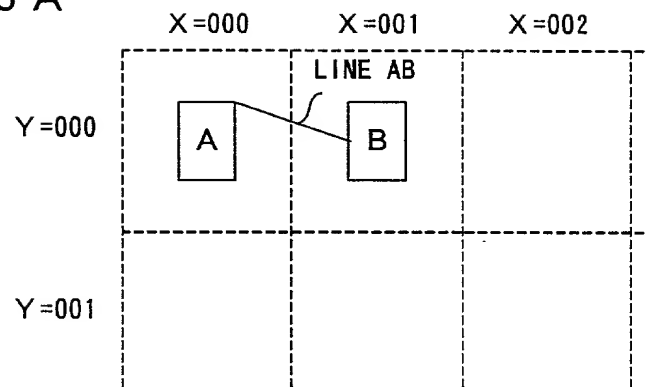


FIG. 5B

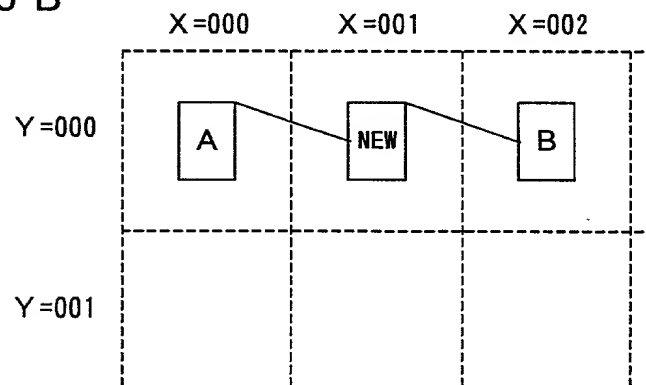

ARRAY 1	DISPLAY INFORMATION	POSITION INFORMATION	ADDITIONAL INFORMATION
00	A	31	
01	B	30	
02			

↓  
VALUE OF THE ARRAY 4  
OF DATA TABLE

FIG. 6A

ARRAY 2	FRONT INFORMATION	REAR INFORMATION	ADDITIONAL INFORMATION
10	00	01	
11			

↓      ↓  
VALUE OF THE ARRAY 1 OF OBJECT  
INFORMATION TABLE

FIG. 6B

ARRAY 3	SELECTION INFORMATION	ADDITIONAL INFORMATION
20	10	
21		

↓  
VALUE OF THE ARRAY 2 OF LINE  
INFORMATION TABLE

FIG. 6C

ARRAY 4	NAME OF DATA	PRECEDING INFORMATION	X COORDINATE	Y COORDINATE	ADDITIONAL INFORMATION
30	B	A	001	000	
31	A		000	000	
32					

FIG. 6D

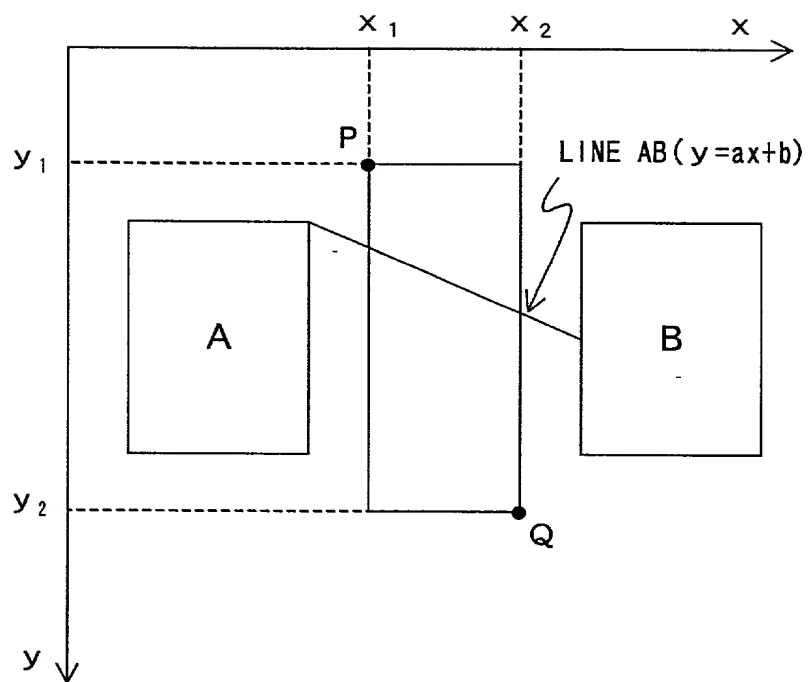


FIG. 7

ARRAY 4	NAME OF DATA	PRECEDING INFORMATION	X COORDINATE	Y COORDINATE	ADDITIONAL INFORMATION
30	B	A	0 0 1	0 0 0	
31	A	_____	0 0 0	0 0 0	
32			0 0 1	0 0 0	

FIG. 8A

ARRAY 2	FRONT INFORMATION	REAR INFORMATION	ADDITIONAL INFORMATION
10	0 0	0 1 → 0 2	
11	0 2	0 1	

FIG. 8B

ARRAY 1	DISPLAY INFORMATION	POSITION INFORMATION	ADDITIONAL INFORMATION
00	A	31	
01	B	30	
02	NEW	32	

↓  
VALUE OF THE ARRAY 4  
OF DATA TABLE

FIG. 9A

ARRAY 2	FRONT INFORMATION	REAR INFORMATION	ADDITIONAL INFORMATION
10	00	02	
11	02	01	

↓                      ↓  
VALUE OF THE ARRAY 1 OF OBJECT  
INFORMATION TABLE

FIG. 9B

ARRAY 4	NAME OF DATA	PRECEDING INFORMATION	X COORDINATE	Y COORDINATE	ADDITIONAL INFORMATION
30	B		002	000	
31	A		000	000	
32	NEW	A	001	000	

FIG. 9C

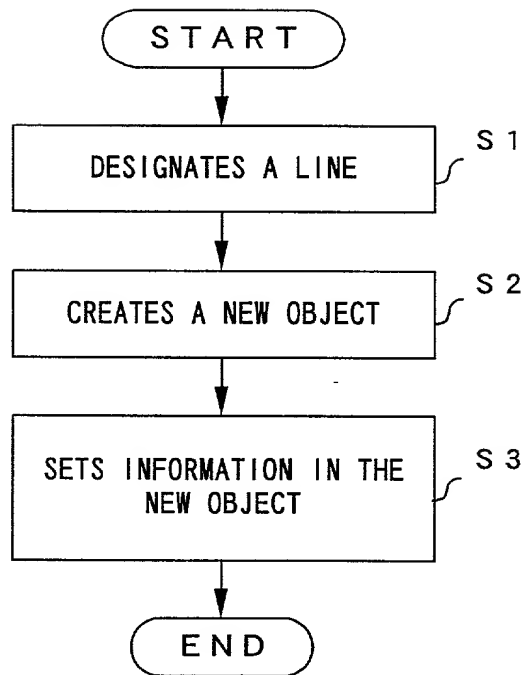


FIG. 10

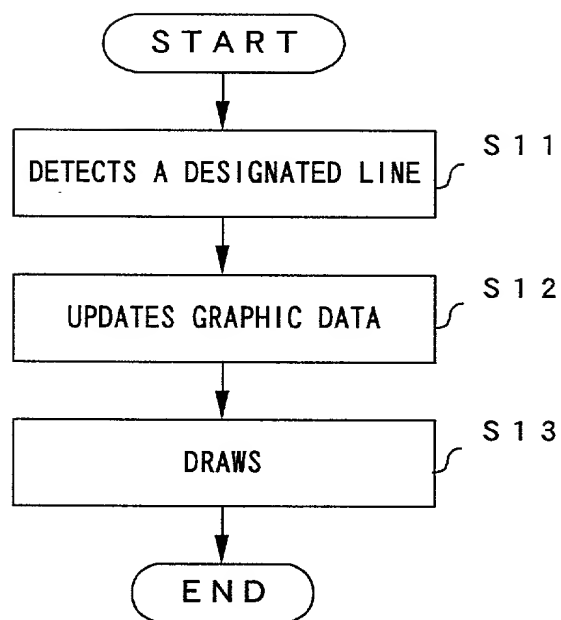


FIG. 11

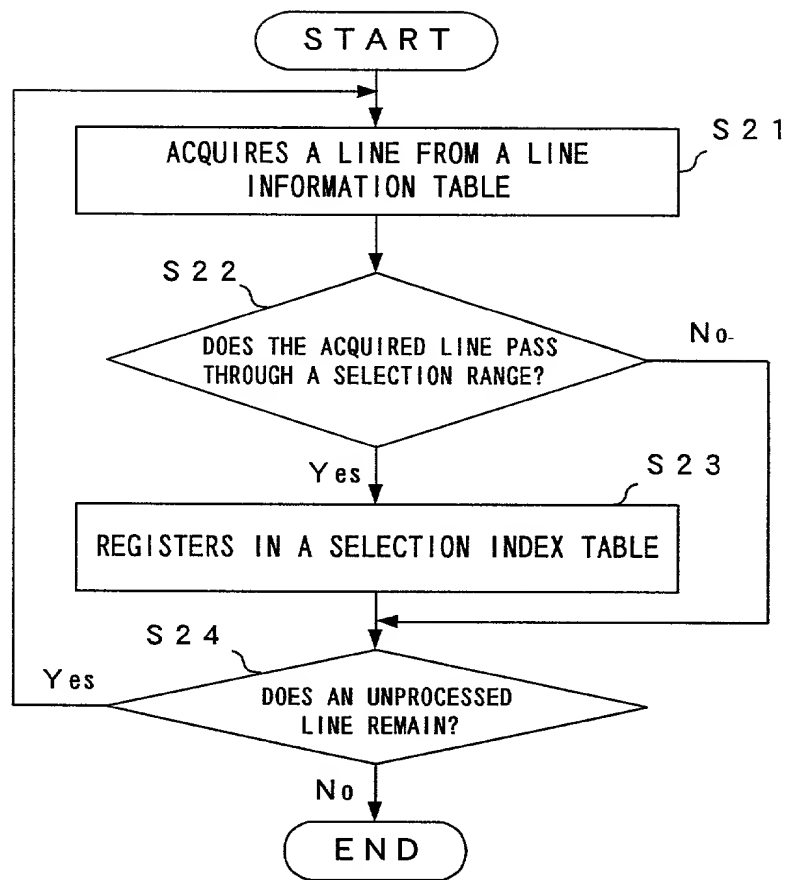


FIG. 12



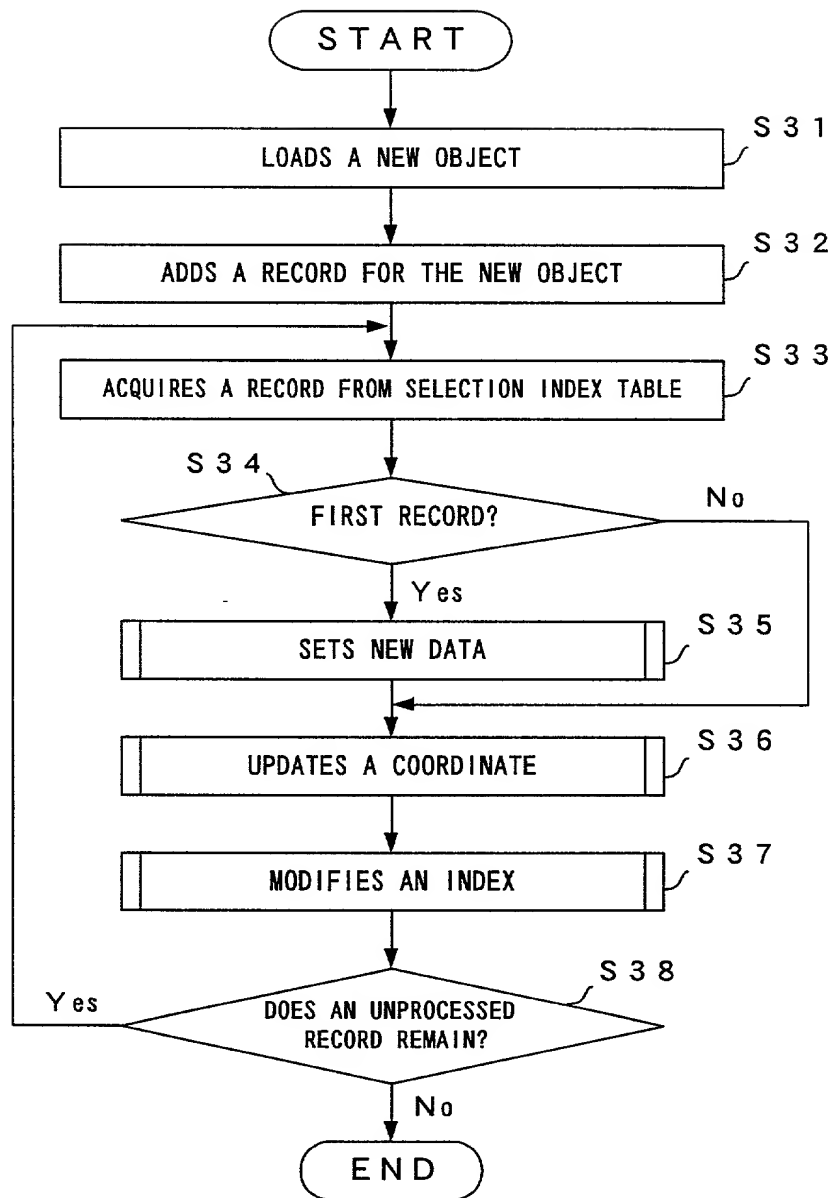


FIG. 13

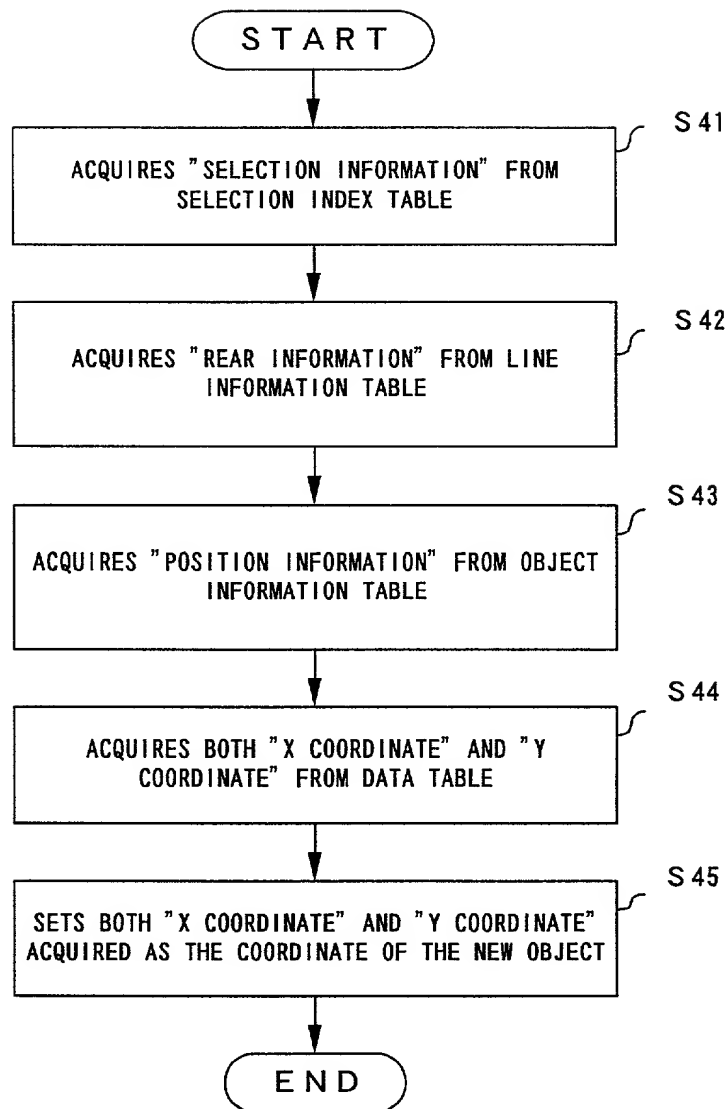


FIG. 14

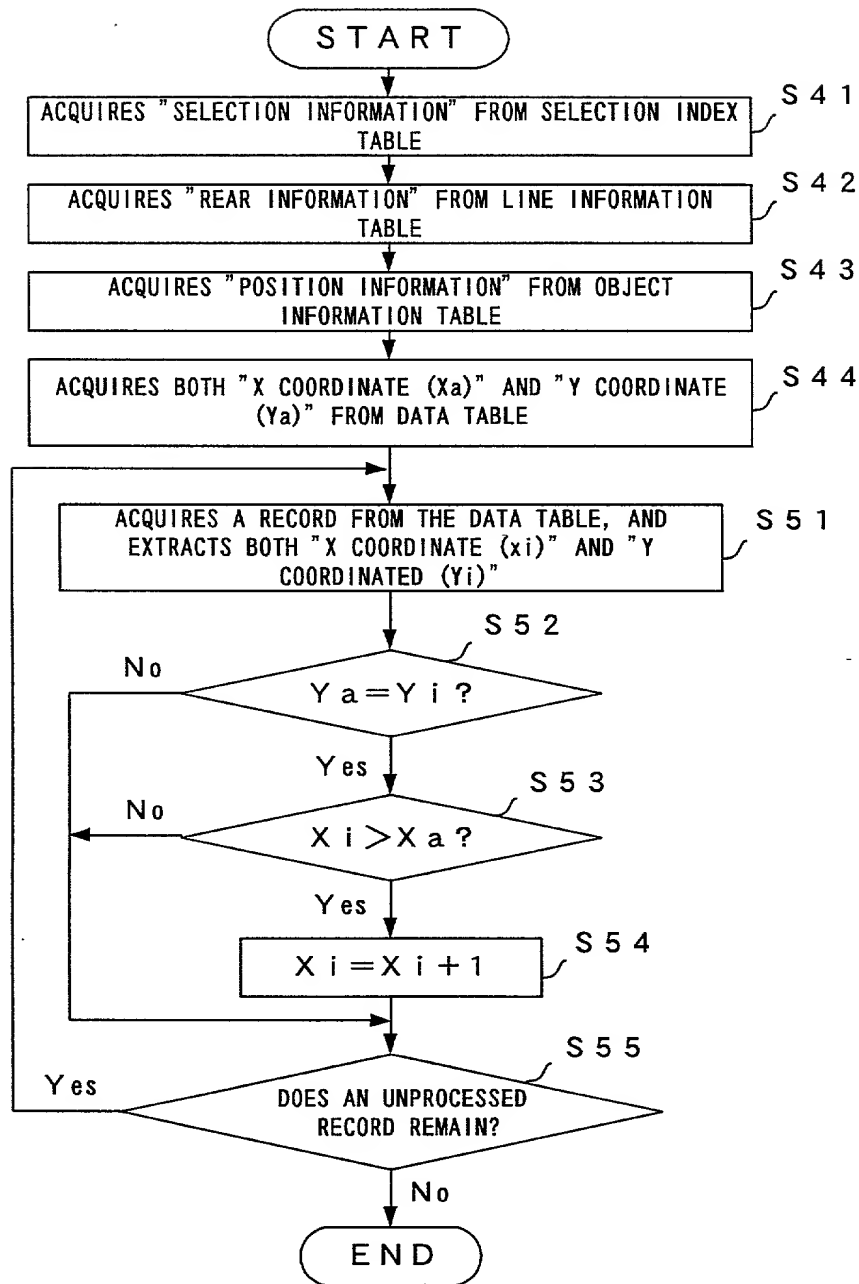


FIG. 15

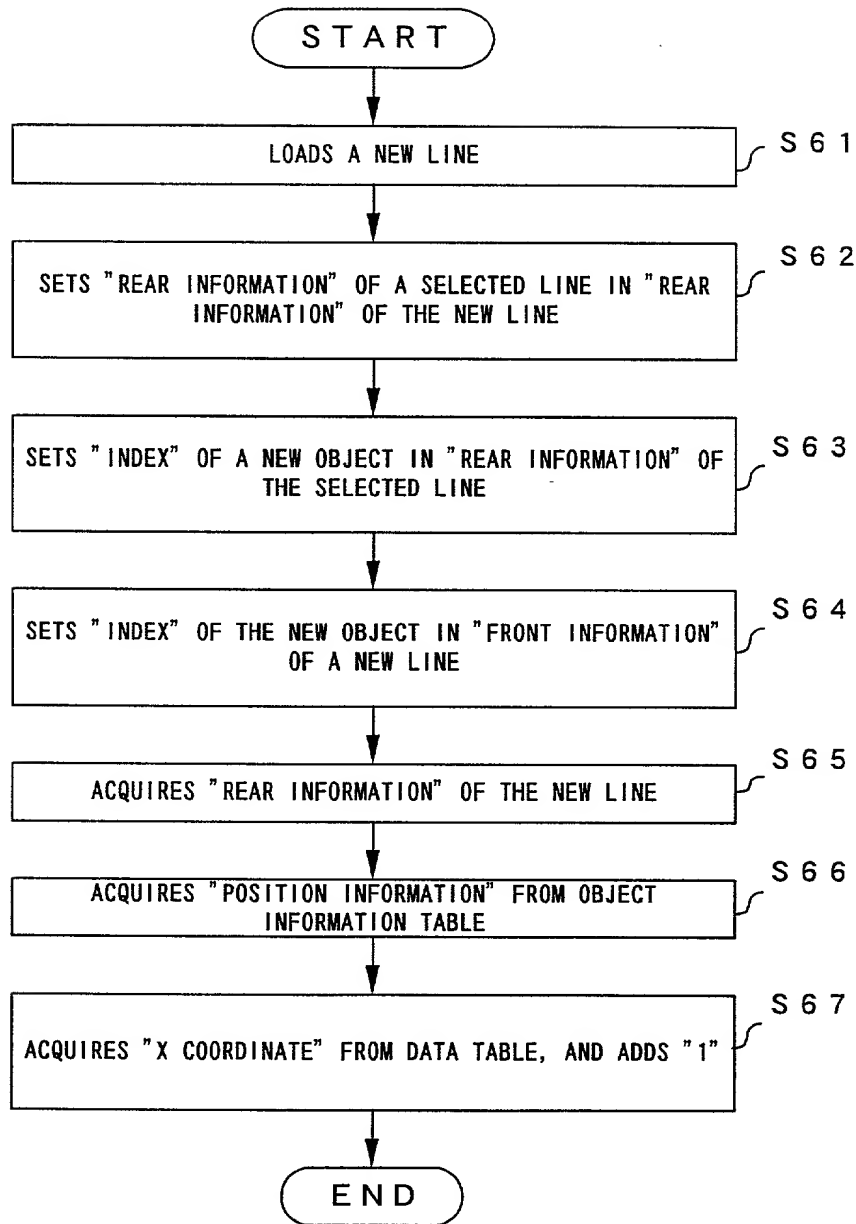


FIG. 16

FIG. 17A




FIG. 17B

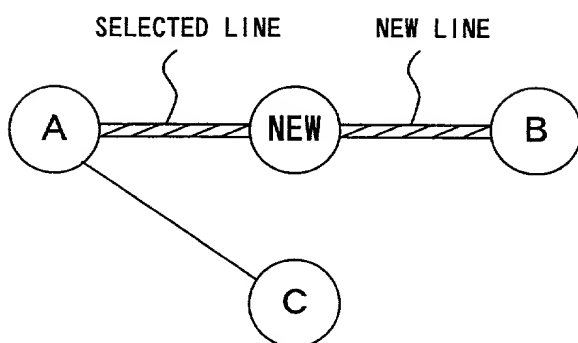


FIG. 18A

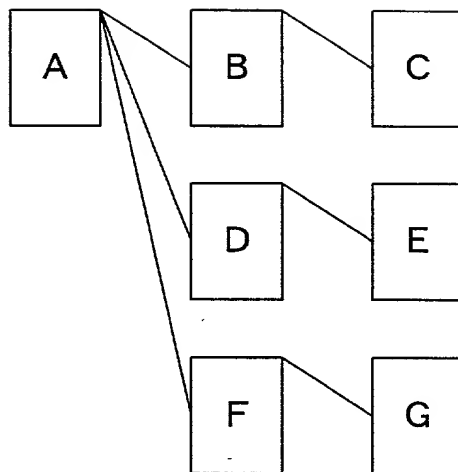
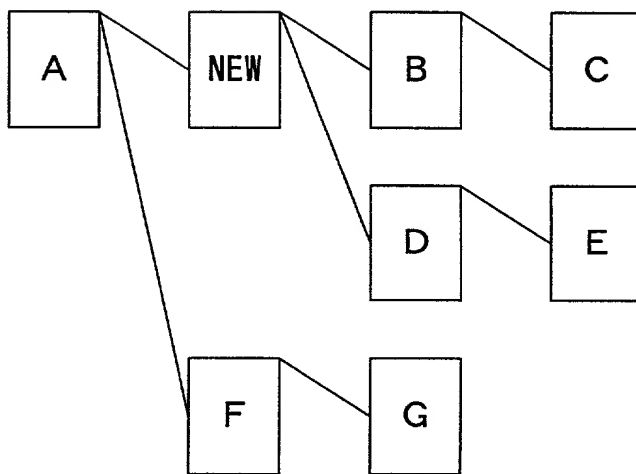


FIG. 18B



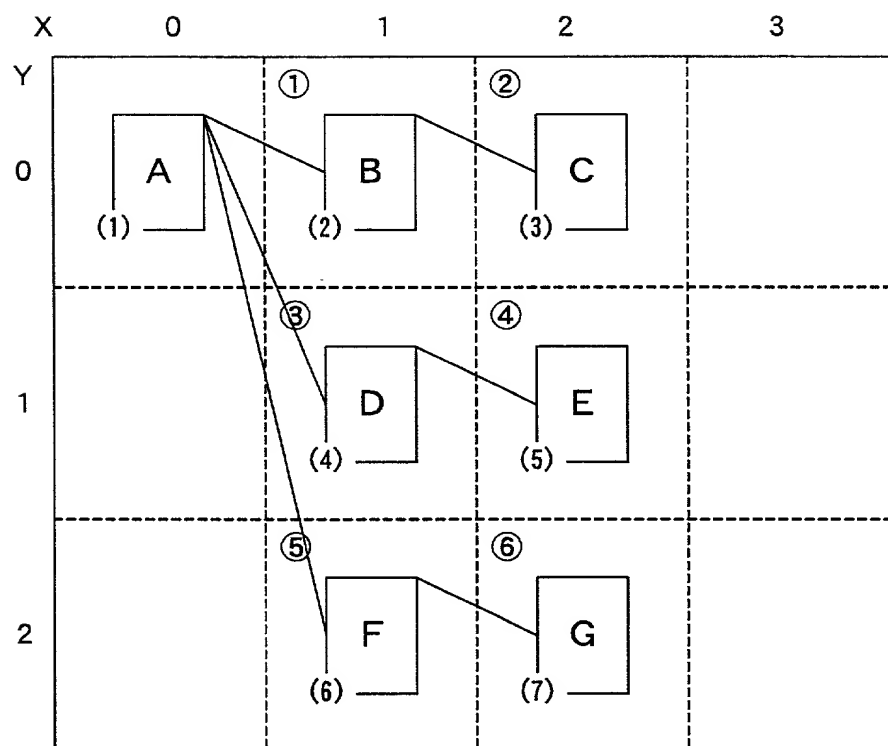


FIG. 19

ARRAY1 INDEX	OBJECT NUMBER	DISPLAY INFORMATION	VIRTUAL X COORDINATE	VIRTUAL Y COORDINATE	ADDITIONAL INFORMATION
1	(1)	A	000	000	
2	(2)	B	001	000	
3	(3)	C	002	000	
4	(4)	D	001	001	
5	(5)	E	002	001	
6	(6)	F	001	002	
7	(7)	G	002	002	

FIG. 20A

ARRAY2 INDEX	CONNECTING LINE NUMBER	FRONT INFORMATION	REAR INFORMATION
1	①	1	2
2	②	2	3
3	③	1	4
4	④	4	5
5	⑤	1	6
6	⑥	6	7

FIG. 20B



FIG. 21A

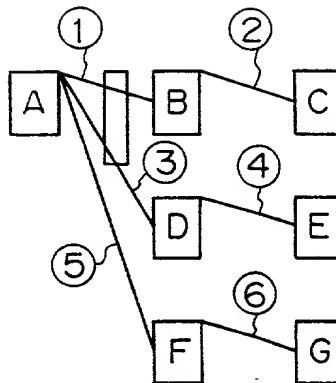


FIG. 21B

ARRAY 3	
INDEX	SELECTED POSITION
1	1
2	3

ARRAY1 INDEX	OBJECT NUMBER	DISPLAY INFORMATION	VIRTUAL X COORDINATE	VIRTUAL Y COORDINATE	ADDITIONAL INFORMATION
1	(1)	A	000	000	
2	(2)	B	001	000	
3	(3)	C	002	000	
4	(4)	D	001	001	
5	(5)	E	002	001	
6	(6)	F	001	002	
7	(7)	G	002	002	
8	(8)				

FIG. 22A

NEW RECORD  
IS ADDED

ARRAY2 INDEX	CONNECTING LINE NUMBER	FRONT INFORMATION	REAR INFORMATION
1	①	1	2
2	②	2	3
3	③	1	4
4	④	4	5
5	⑤	1	6
6	⑥	6	7
7	⑦		

NEW RECORD  
IS ADDED

FIG. 22B

ARRAY3 INDEX	SELECTED POSITION
1	1
2	3

ARRAY2 INDEX	CONNECTING LINE NUMBER	FRONT INFORMATION	REAR INFORMATION
1	①	1	2
2	②	2	3
3	③	1	4
4	④	4	5
5	⑤	1	6
6	⑥	6	7
7	⑦		

ARRAY1 INDEX	OBJECT NUMBER	DISPLAY INFORMATION	VIRTUAL X COORDINATE	VIRTUAL Y COORDINATE	ADDITIONAL INFORMATION
1	(1)	A	000	000	
2	(2)	B	000	000	
3	(3)	C	002	000	
4	(4)	D	001	001	
5	(5)	E	002	001	
6	(6)	F	001	002	
7	(7)	G	002	002	
8	(8)		001	000	

FIG. 23

ARRAY1 INDEX	OBJECT NUMBER	DISPLAY INFORMATION	VIRTUAL X COORDINATE	VIRTUAL Y COORDINATE	ADDITIONAL INFORMATION
1	(1)	A	000	000	
2	(2)	B	001	000	
3	(3)	C	002	000	
4	(4)	D	001	001	
5	(5)	E	002	001	
6	(6)	F	001	002	
7	(7)	G	002	002	
8	(8)		001	000	

ARRAY1 INDEX	OBJECT NUMBER	DISPLAY INFORMATION	VIRTUAL X COORDINATE	VIRTUAL Y COORDINATE	ADDITIONAL INFORMATION
1	(1)	A	000	000	
2	(2)	B	002	000	
3	(3)	C	003	000	
4	(4)	D	001	001	
5	(5)	E	002	001	
6	(6)	F	001	002	
7	(7)	G	002	002	
8	(8)		001	000	

ARRAY2 INDEX	CONNECTING LINE NUMBER	FRONT INFORMATION	REAR INFORMATION
1	①	1	2
2	②	2	3
3	③	1	4
4	④	4	5
5	⑤	1	6
6	⑥	6	7
7	⑦		8

FIG. 24

ARRAY3 INDEX	SELECTED POSITION
1	1
2	3

ARRAY2 INDEX	CONNECTING LINE NUMBER	FRONT INFORMATION	REAR INFORMATION
1	①	①	2
2	②	2	3
3	③	1	4
4	④	4	5
5	⑤	1	6
6	⑥	6	7
7	⑦	①	8

FIG. 25A

ARRAY3 INDEX	SELECTED POSITION
1	1
2	3

ARRAY2 INDEX	CONNECTING LINE NUMBER	FRONT INFORMATION	REAR INFORMATION
1	①	⑧	2
2	②	2	3
3	③	1	4
4	④	4	5
5	⑤	1	6
6	⑥	6	7
7	⑦	1	⑧

FIG. 25B

ARRAY3 INDEX	SELECTED POSITION
1	1
2	3

ARRAY2 INDEX	CONNECTING LINE NUMBER	FRONT INFORMATION	REAR INFORMATION
1	①	1	2
2	②	2	3
3	③	1	4
4	④	4	5
5	⑤	1	6
6	⑥	6	7
7	⑦	1	8

ARRAY1 INDEX	OBJECT NUMBER	DISPLAY INFORMATION	VIRTUAL X COORDINATE	VIRTUAL Y COORDINATE	ADDITIONAL INFORMATION
1	(1)	A	000	000	
2	(2)	B	002	000	
3	(3)	C	003	000	
4	(4)	D	001	001	
5	(5)	E	002	001	
6	(6)	F	001	002	
7	(7)	G	002	002	
8	(8)		001	000	

ARRAY1 INDEX	OBJECT NUMBER	DISPLAY INFORMATION	VIRTUAL X COORDINATE	VIRTUAL Y COORDINATE	ADDITIONAL INFORMATION
1	(1)	A	000	000	
2	(2)	B	002	000	
3	(3)	C	003	000	
4	(4)	D	002	001	
5	(5)	E	003	001	
6	(6)	F	001	002	
7	(7)	G	002	002	
8	(8)		001	000	

FIG. 26

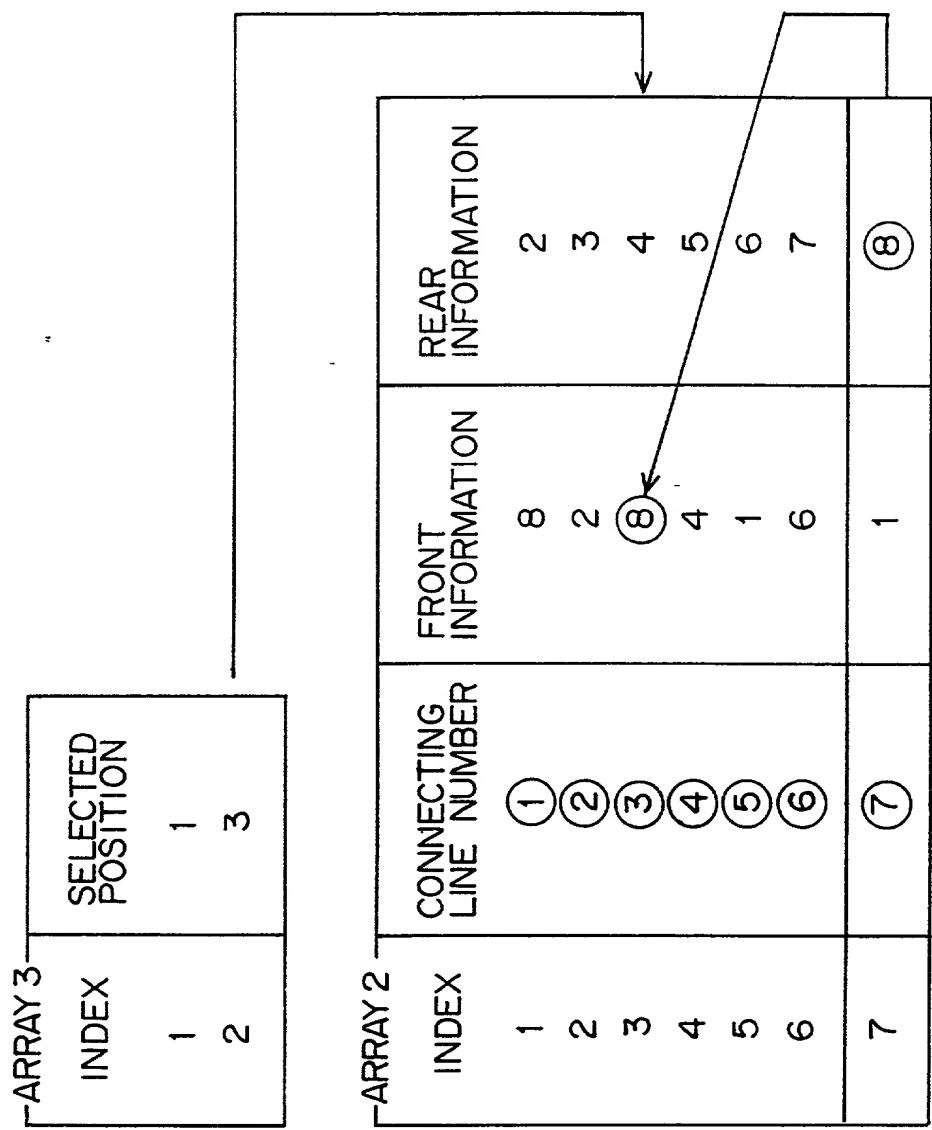


FIG. 27

ARRAY1 INDEX	OBJECT NUMBER	DISPLAY INFORMATION	VIRTUAL X COORDINATE	VIRTUAL Y COORDINATE	ADDITIONAL INFORMATION
1	(1)	A	000	000	
2	(2)	B	002	000	
3	(3)	C	003	000	
4	(4)	D	002	001	
5	(5)	E	003	001	
6	(6)	F	001	002	
7	(7)	G	002	002	
8	(8)		001	000	

FIG. 28A

ARRAY2 INDEX	CONNECTING LINE NUMBER	FRONT INFORMATION	REAR INFORMATION
1	①	8	2
2	②	2	3
3	③	8	4
4	④	4	5
5	⑤	1	6
6	⑥	6	7
7	⑦	1	8

FIG. 28B



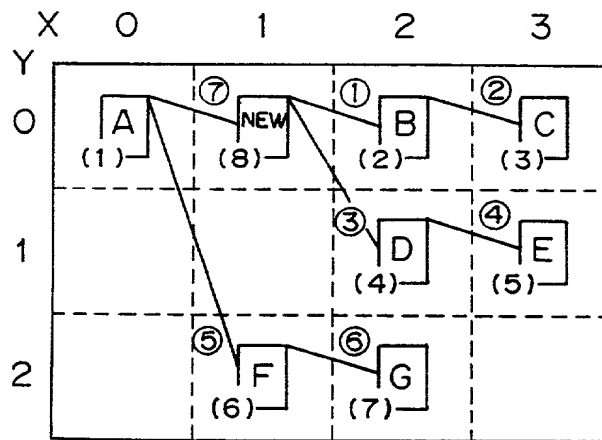


FIG. 29

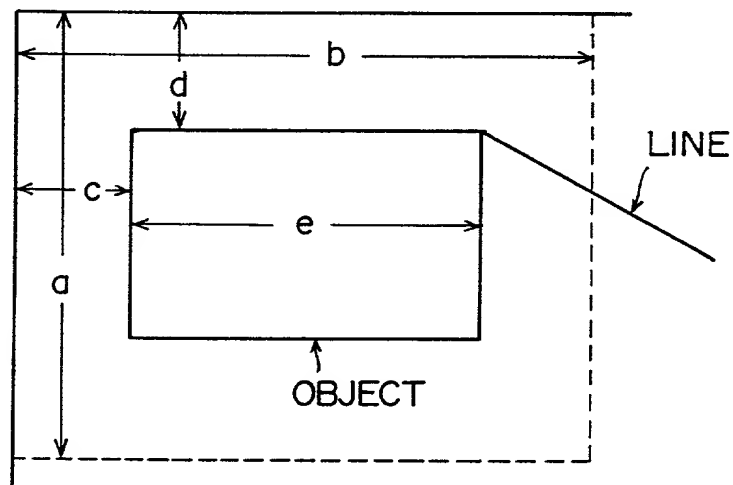


FIG. 30

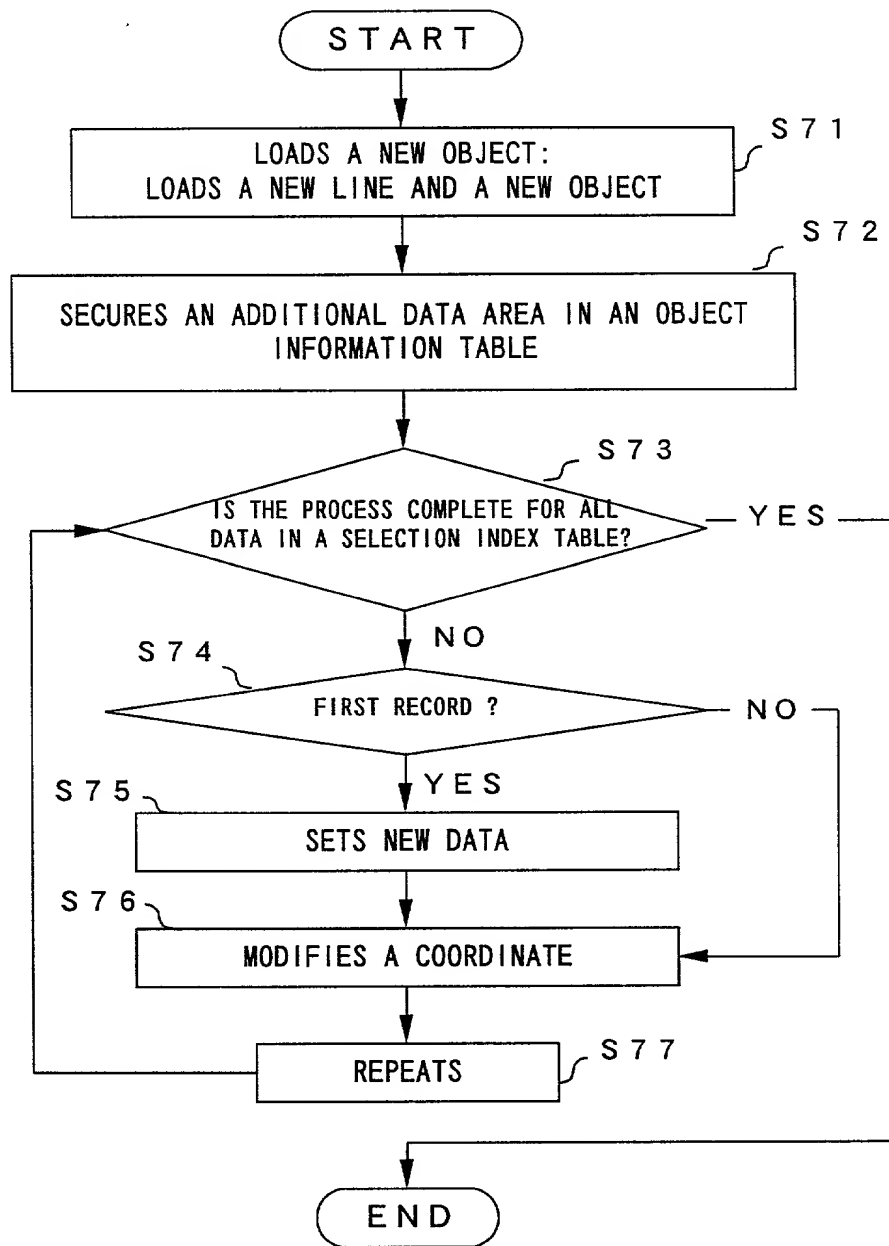


FIG. 31

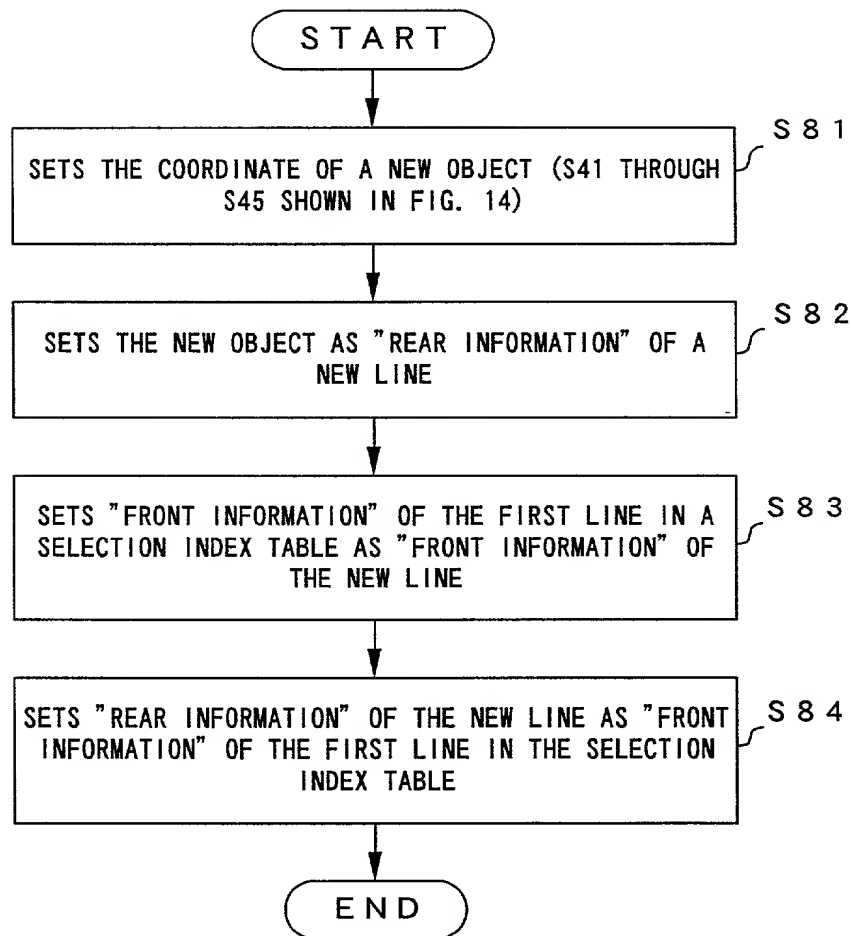


FIG. 32

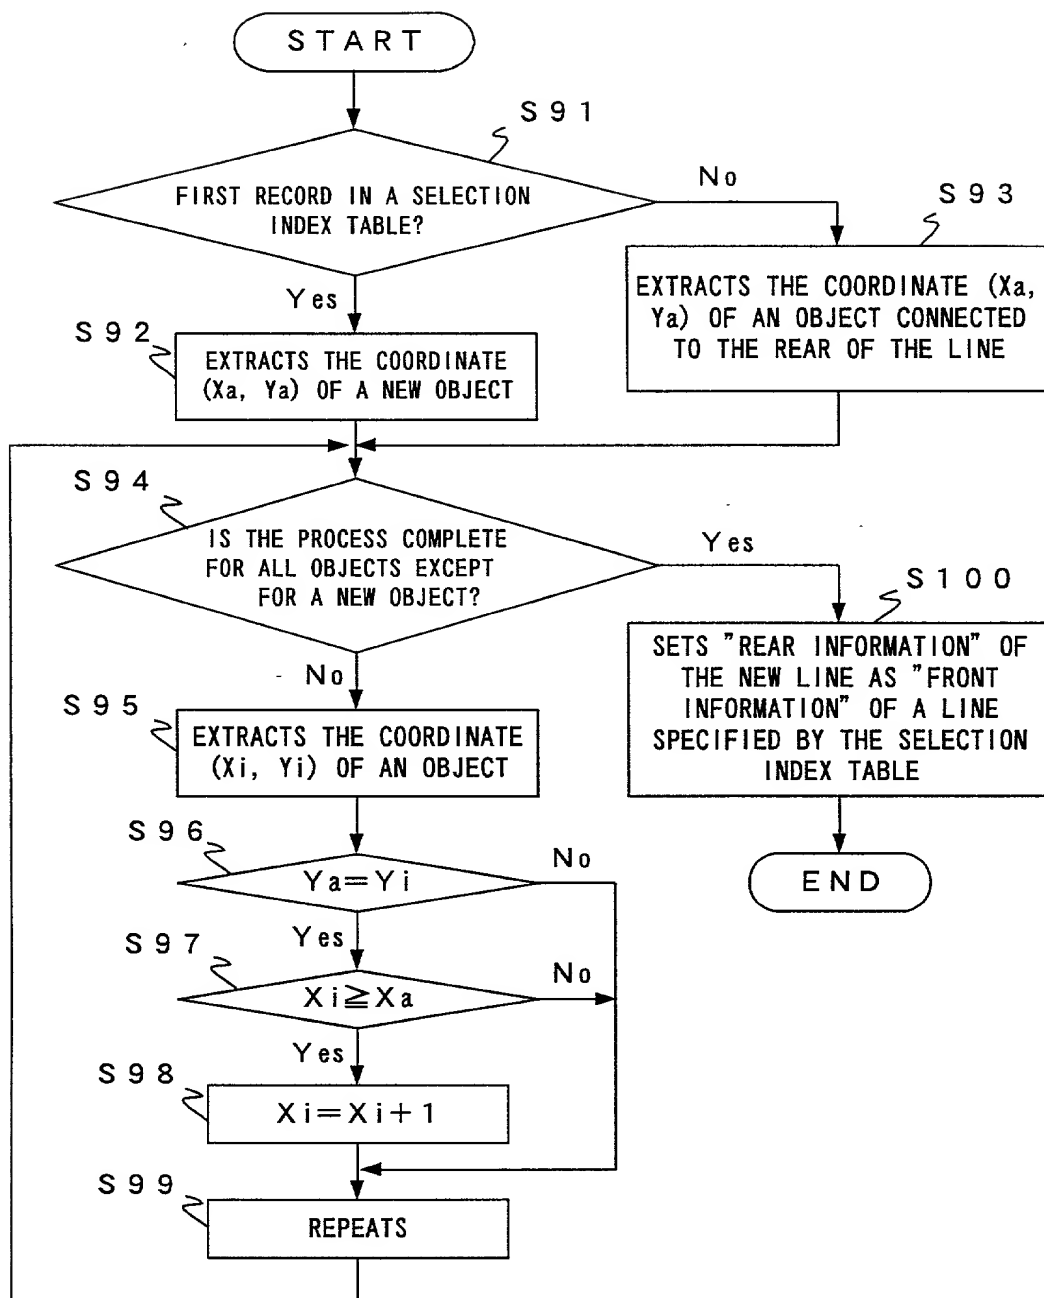
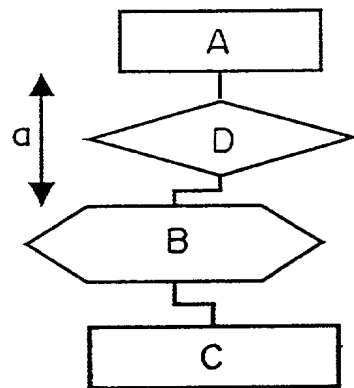
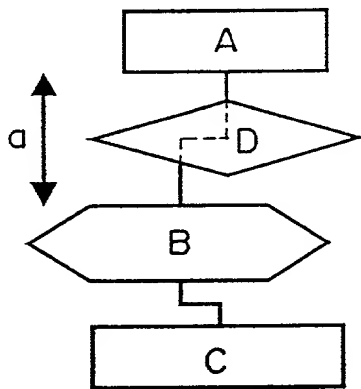
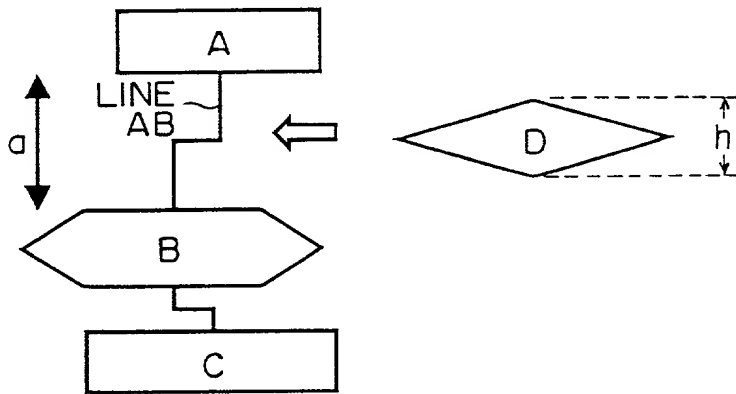


FIG. 33



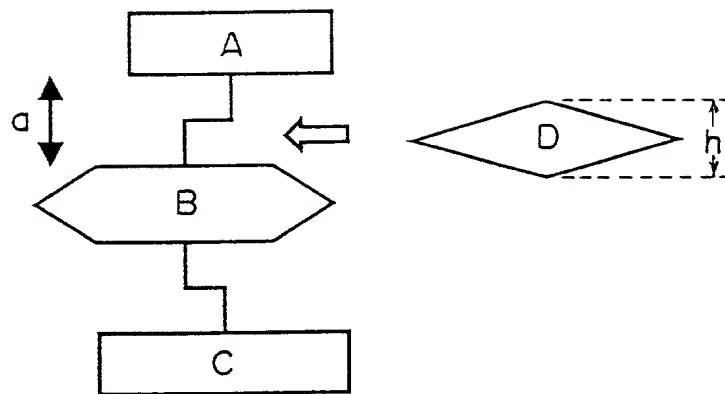


FIG. 35A


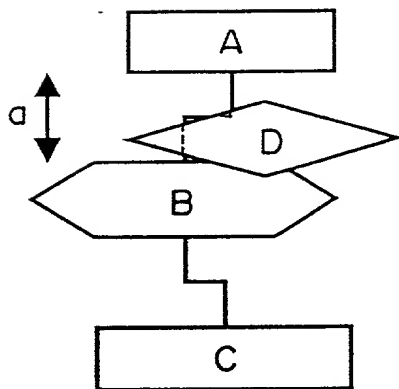


FIG. 35B

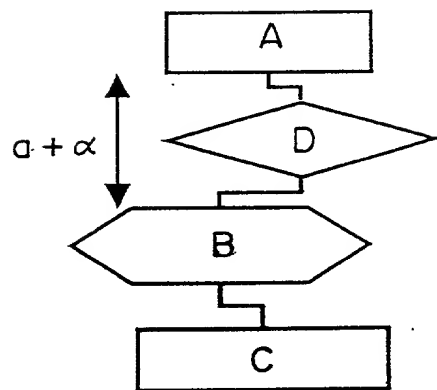

$$(a + \alpha > h)$$

FIG. 35C

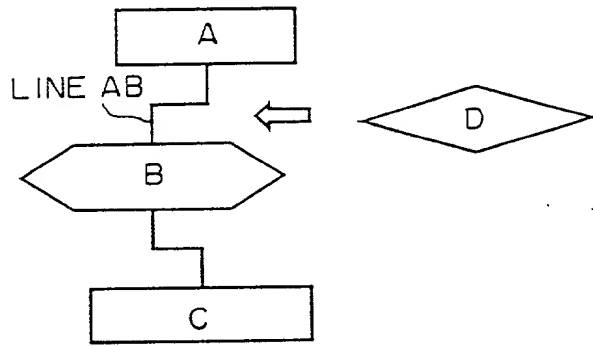


FIG. 36A

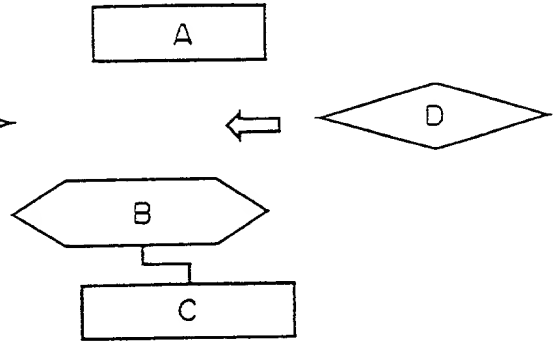


FIG. 36B




FIG. 36C




FIG. 36D

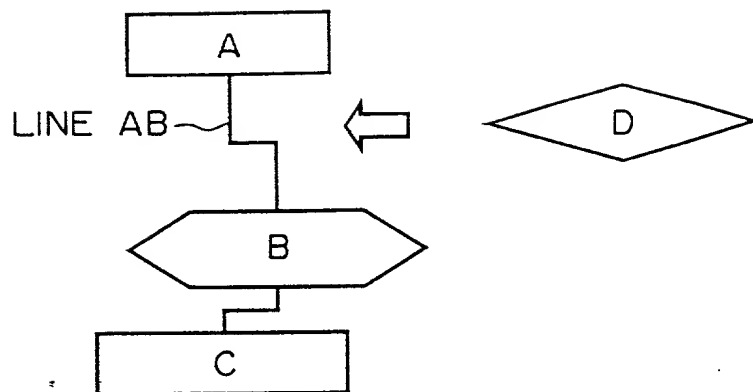


FIG. 37A

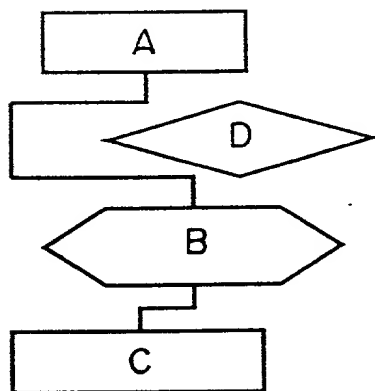


FIG. 37B



FIG. 38A

INDEX	NAME OF OBJECT	COORDINATE	SHAPE	HEIGHT	WIDTH	-----
1	A	(Px, Py)	RECTANGLE	PH	PW	
2	B	(Qx, Qy)	RECTANGLE	QH	QW	
3	C	(Mx, My)	RECTANGLE	MH	MW	

ADDED →

FIG. 38B

INDEX	NAME OF LINE	FRONT INFORMATION	STARTING POINT COORDINATE	REAR INFORMATION	END POINT COORDINATE	HEIGHT
1	D	A	(LSx, LSy)	B	(LEX, LEy)	LH
2	E		(NSx, NSy)		(NEX, NEy)	NH

ADDED →

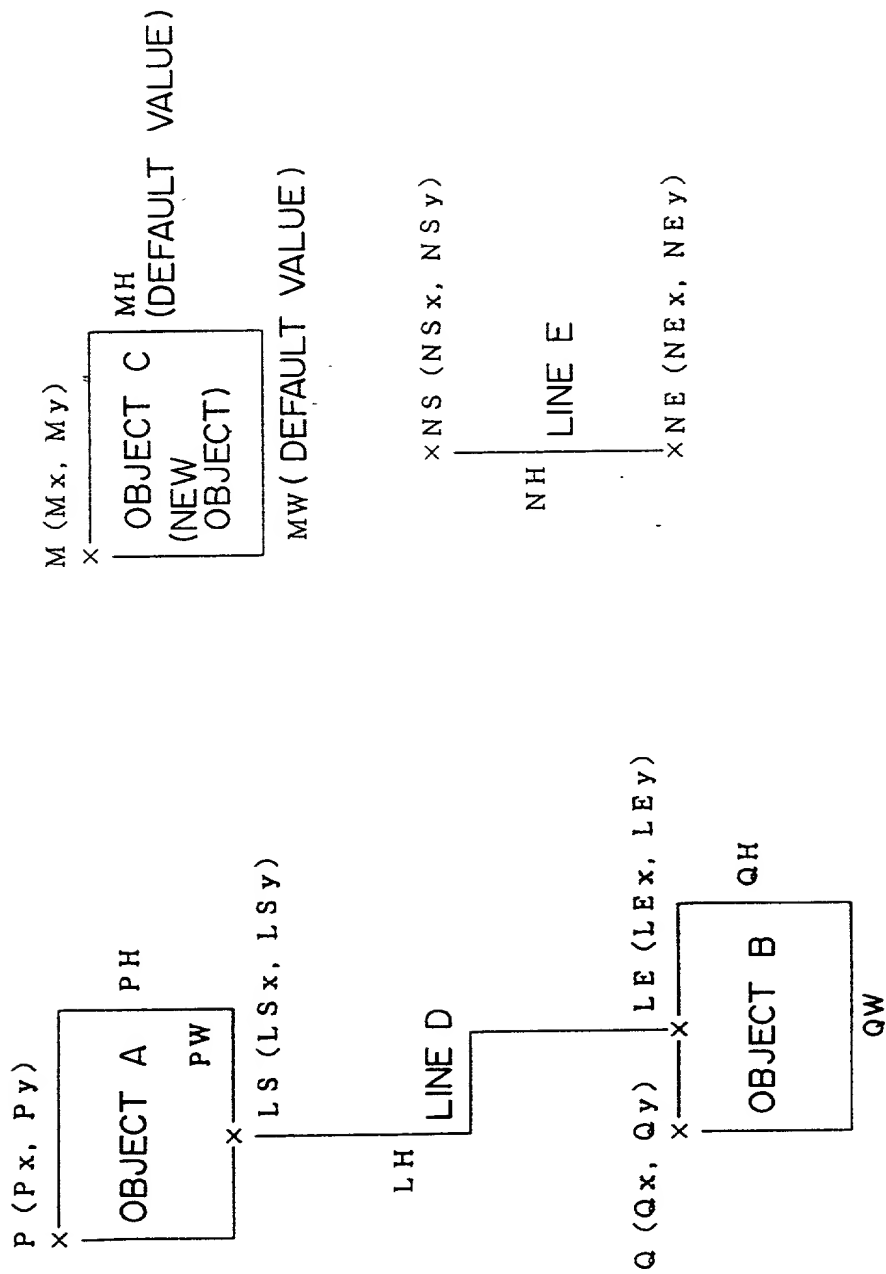


FIG. 39

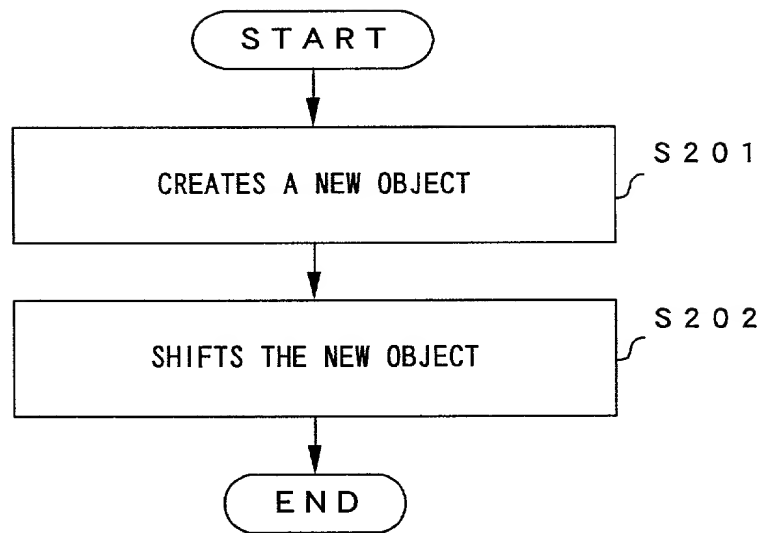


FIG. 40

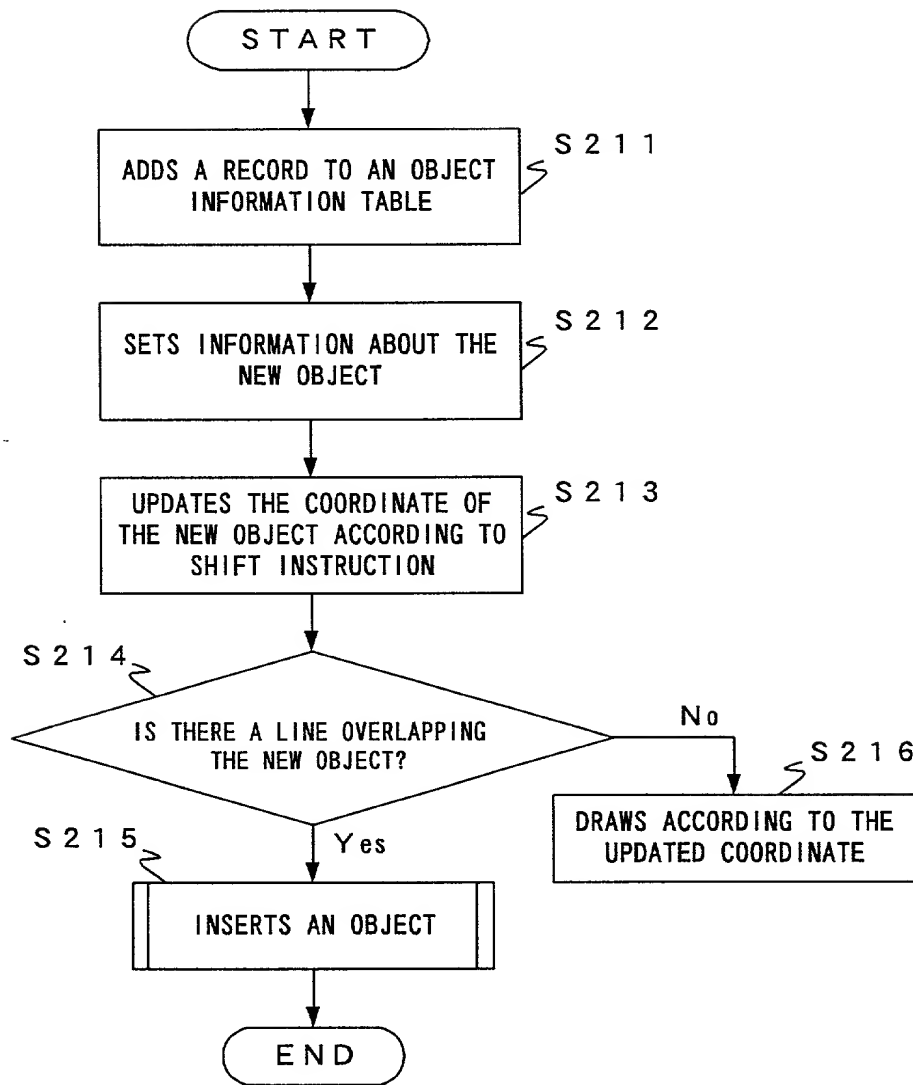


FIG. 41

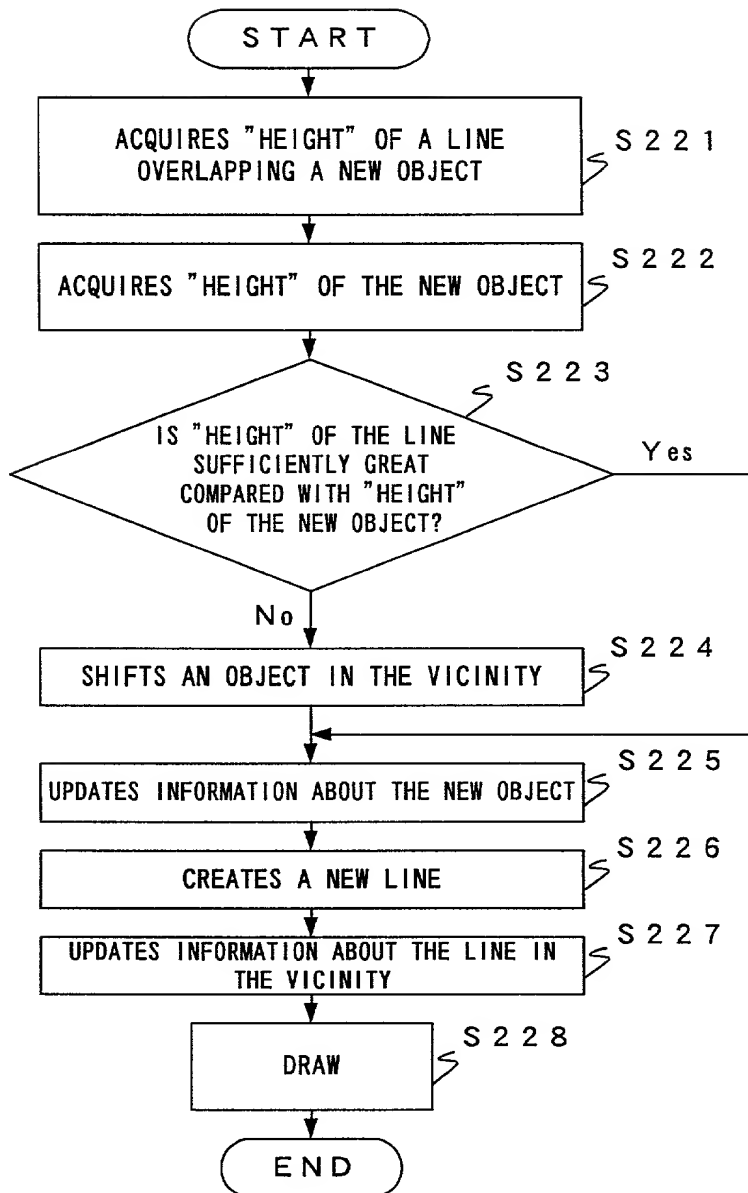


FIG. 42

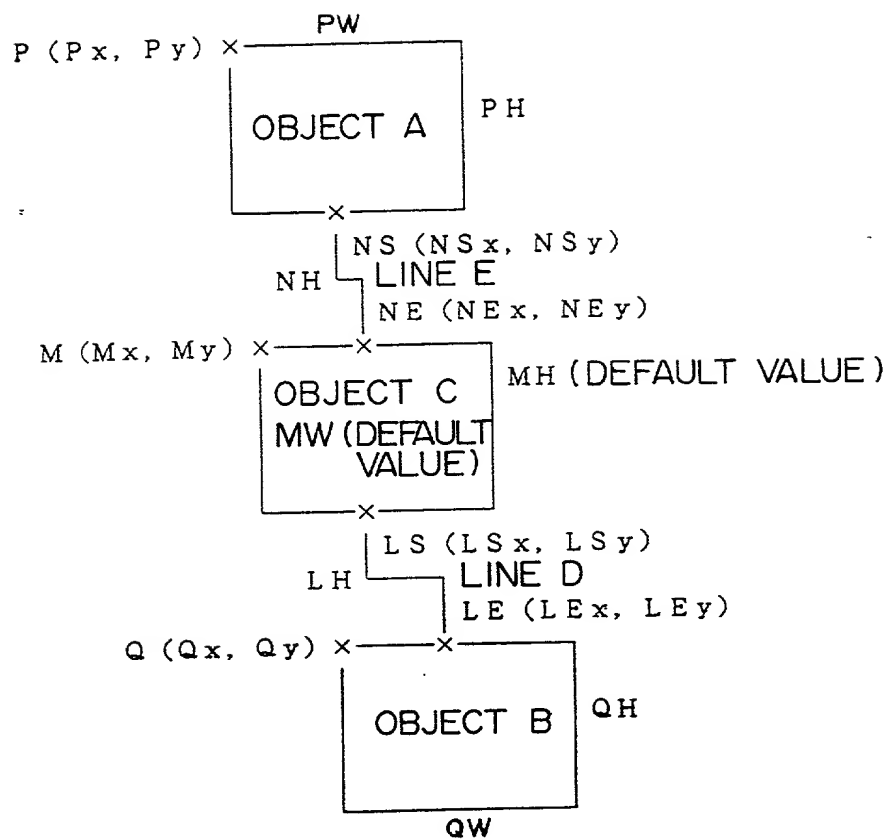


FIG. 43

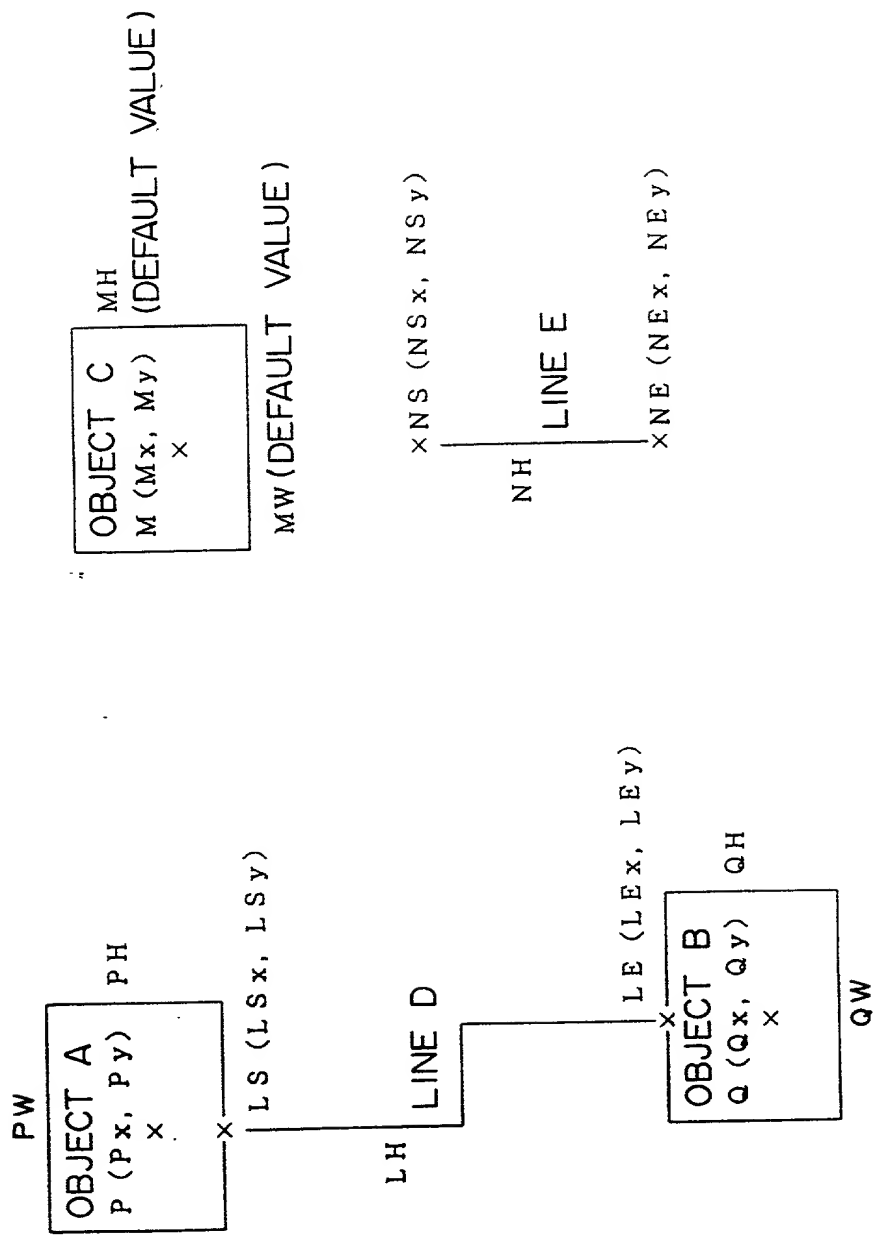


FIG. 44

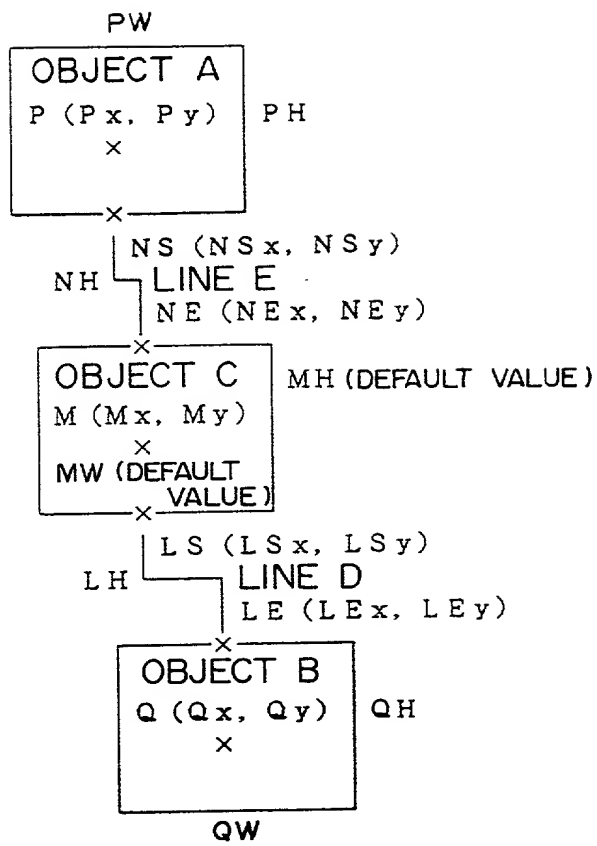


FIG. 45



FIG. 46A

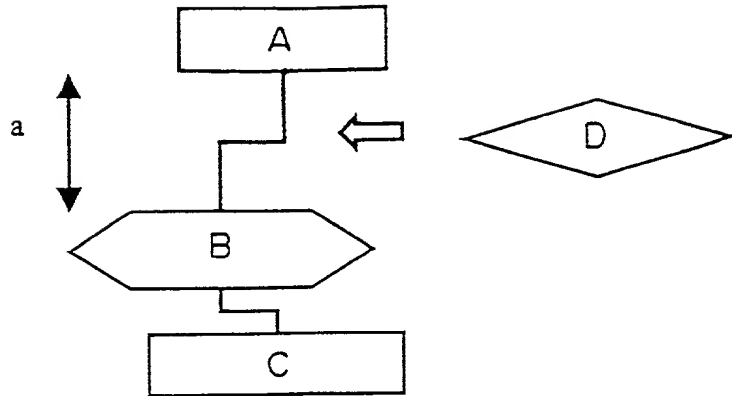


FIG. 46B

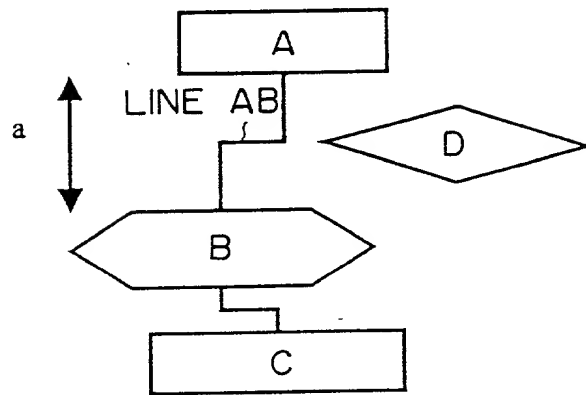
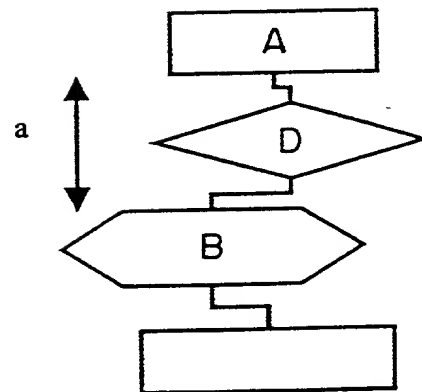


FIG. 46C



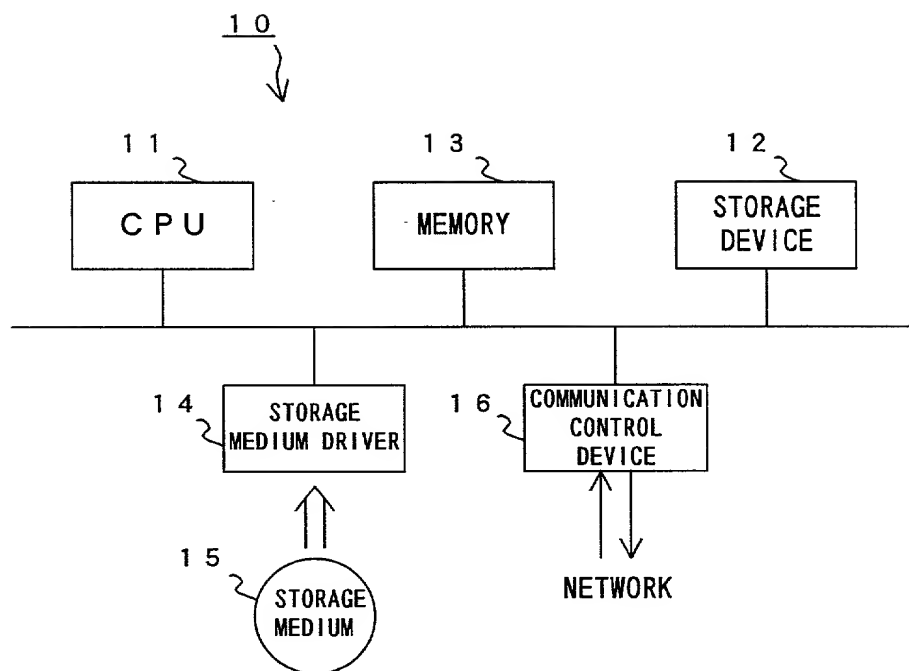


FIG. 47

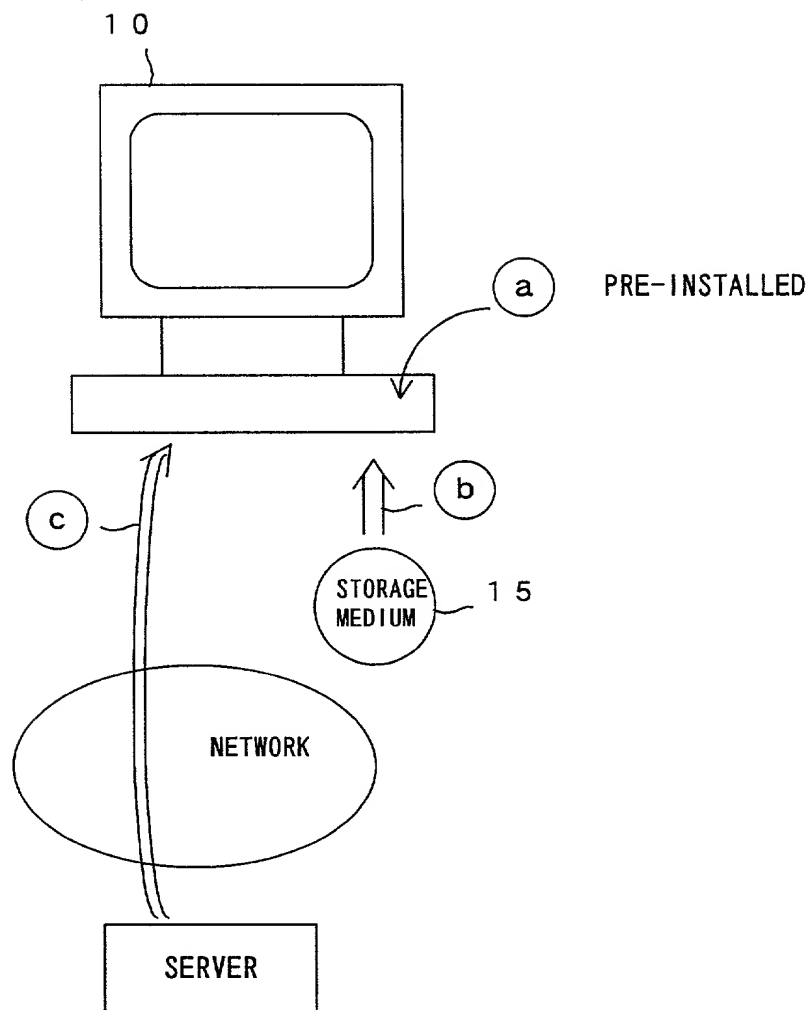


FIG. 48

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

GRAPHIC EDITING APPARATUS, GRAPHIC  
EDITING METHOD AND STORAGE MEDIUM ON  
WHICH IS RECORDED A PROGRAM FOR  
GRAPHIC EDITING

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Page 1 of 3

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願  
11-085587

(Number)  
(番号)

Japan

(Country)  
(国名)

(Number)  
(番号)

(Country)  
(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)項に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

29th/March/1999

(Day/Month/Year Filed)  
(出願年月日)

(Day/Month/Year Filed)  
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M. Schertler, 35,348 (agent)

書類送付先

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Send Correspondence to:

STAAS & HALSEY  
700 Eleventh Street, N.W.  
Suite 500  
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY  
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor
	Nobuhiro SAITOU
発明者の署名	Inventor's signature
日付	Date
	Nobuhiro Saitou October 20, 1999
住所	Residence
	Tokyo, Japan
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o FUJITSU SOCIAL SYSTEMS ENGINEERING LIMITED, Gotanda-AN Bldg.,
	22-1, Higashigotanda 1-chome, Sinagawa-ku, Tokyo 141-0022, Japan
第二共同発明者	Full name of second joint inventor, if any
第二共同発明者	Second inventor's signature
日付	Date
住所	Residence
国籍	Citizenship
私書箱	Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をする)

(Supply similar information and signature for third and subsequent joint inventors.)